











Dewconect®

Together We Grow

Dewconect®
Together We Grow

COMPANY PROFILE

Company Profile

DEVAS ELEKTRO WERKE is an ISO 9001:2015 certified company. Devas Group is a leader in state of art of manufacturing of Cable Terminals, Connectors, Bimetallic Terminals, Cable Glands & Cable Accessories under Brand Name **"DEWCONECT"**. Which mean to deliver DURABLE, EFFICIENT & **WORLD BEST QUALITY PRODUCTS.** Our objective is to serve **WORLD BEST TERMINAL TECHNOLOGY IN CABLE END TERMINATION.**

It is rightly said that **SUCCESS** is not possible without U. Company drives it strength from its customer and those begin in sector like Utilities, Power Generation, Transmission & Distribution, Oil refineries, steel & metal, Cement, Atomic energy, nuclear plants, **ELECTRICITY BOARDS**, Metro Railways, Locomotives, telecom industries, Automobile Industries and may more.

A. QUALITY & RELIABILITY.

Our Aim is to achieve the highest level of Product Quality, Reliability and Safety.

"DEWCONECT" Brand with its uncompromising quality standard have proven its merits again and again. Entire DEWCONECT Products range are manufactured, Certified, Tested and Approved by GOVT. Laboratory with its latest Quality standard.

B. INNOVATIVE R & D.

We at DEWCONECT with accumulated Experience in the field of terminal technology understand the need of end customer and provide complete solution with latest technique in Cable End termination.

WHY DEWCONTECT ?

C. MISSION

To build strong brand and maintain superior quality for customer satisfaction.

D. VISION.

"Our vision is to improve the quality of life and bring greater happiness of our customer. We will do so though reliable, safe, sustainable and world best in class products and services, while enhancing stakeholder value continuously.




MERITS/ BENEFITS OF DEWCONECT CABLE TERMINALS, CONNECTORS & GLANDS.

A. High grade conductive metal.
   Copper conductivity is 99.9% iacs.
   Aluminium conductivity is 61% iacs.
B. Low contact resistance. Saves electricity.
C. High contact surface area due to uniform serration.
D. Easy cable entry/ user friendly.
E. Ergonomic in cable end termination.
F. Compatible to high rating compact cables.
G. Reverse & forward integration.

Dewconect®
Together We Grow


DEW PRODUCT CATEGORY



CABLE TERMINALS, CONNECTORS.



CABLE GLANDS.



CABLE ACCESSORIES.

CABLE TERMINALS, CONNECTORS.

DEWCONECT is a leading technocrat in designing and Manufacturing of Solderless electrical Terminals, connectors and these connectors or Terminals are crimped on the surface of conductor to facilitate end termination of straight connection with utmost reliability. Company product wide range of copper / aluminium / bimetallic Terminals- COATING TYPE & FRICTION WELDED TYPE, connectors suitable / compatible to entire range & type of cables available in Electrical industries. All our products are available in Aluminium (natural finish) And copper (Electrolytically Tin plated to Prevent oxidation.



CABLE GLANDS.

DEWCONECT CABLE GLANDS are available in wide range in DOUBLE COMPRESSION WEATHERPROOF, DOUBLE COMPRESSION FLAME PROOF, SINGLE COMPRESSION – MEDIUM DUTY & HEAVY DUTY SIBG TYPE suitable for ARMOURED (FLAT & ROUND WIRE), UN AROMOURD CABLES FOR LT & HT TERMINATION. DEWCONECT cable glands are also used for INDOOR AND OUTDOOR – HAZARDOUS CONDITIONS for which glands are type tested. Glands are available in high grade BRASS with Nickel plated finish as per standard. TIN/ cadmium PLATED/ are available on REQUEST. Glands are also available in SS- 316/304.high grade steel.



CABLE ACCESSORIES.

Extensive list of tools & accessories are developed to offer the best equipment for crimping and preparing connections. We also manufacture copper braid as per customer specifications.

a. LSF/LSZH- shrouds.
b. Earth Tag.
c. Glands – reducer/ adaptors.
d. Earthing & Overhead accessories.








Dewconect®
Together We Grow

COPPER TUBE TERMINALS (MEDIUM DUTY)



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	H	G	J	Dew price (₹)
DCUS-05	2.5	M5	2.0	3.7	9	1.0	7	3	5	5	20	**8.88**
DCUS-06	4.0	M6	3.1	4.8	11	1.0	7	3	6	6	22	**11.85**
DCUS-07	6.0	M6	3.8	5.5	11	1.0	9	3	6	6	24	**13.33**
DCUS-08	10	M6	4.4	6.2	11	1.3	9	3	6	6	24	**16.28**
DCUS-09	16	M6	5.3	7.1	11	1.6	12	4	8	6	30	**29.79**
DCUS-10	25	M6	7.0	9.0	13	2.0	12	5	12	8	37	**36.18**
DCUS-11	35	M6	8.0	10.0	15	2.0	12	5	12	8	37	**52.14**
DCUS-12	35	M8	8.0	10.0	15	2.0	12	5	12	8	37	**52.14**
DCUS-13	50	M6	9.2	11.2	16	2.0	16	8	11	10	45	**69.16**
DCUS-14	50	M8	9.2	11.2	16	2.0	16	8	11	10	45	**69.16**
DCUS-15	50	M10	9.2	11.2	16	2.0	16	8	11	10	45	**69.16**
DCUS-16	70	M8	11.6	13.8	20	2.2	18	10	15	13	56	**N/A**
DCUS-17	70	M10	11.6	13.8	20	2.2	18	10	15	13	56	**119.17**
DCUS-18	70	M12	11.6	13.8	20	2.2	18	10	15	13	56	**N/A**
DCUS-19	95	M10	12.8	15.6	23	2.8	20	10	15	13	58	**172.37**
DCUS-20	95	M12	12.8	15.6	23	2.8	20	10	15	13	58	**172.37**
DCUS-21	120	M10	14.8	17.8	26	3.0	22	10	16	14	62	**217.06**
DCUS-22	120	M12	14.8	17.8	26	3.0	22	10	16	14	62	**217.06**
DCUS-23	120	M16	14.8	17.8	26	3.0	22	10	16	14	62	**217.06**
DCUS-24	150	M10	16.0	19.6	28	3.6	26	11	18	15	70	**319.20**
DCUS-25	150	M12	16.0	19.6	28	3.6	26	11	18	15	70	**319.20**
DCUS-26	150	M16	16.0	19.6	28	3.6	26	11	18	15	70	**319.20**
DCUS-27	185	M12	18.0	22.0	32	4.0	30	11	21	21	83	**474.54**
DCUS-28	185	M16	18.0	22.0	32	4.0	30	11	21	21	83	**474.54**
DCUS-231	225	M16	20.0	24.0	32	4.0	34	13	24	24	95	**561.79**
DCUS-29	240	M16	22.0	26.0	35	4.0	36	13	24	24	97	**635.21**
DCUS-30	240	M20	22.0	26.0	38	4.0	36	13	24	24	97	**635.21**
DCUS-31	300	M16	24.0	28.7	42	4.7	39	13	26	25	103	**943.77**
DCUS-32	300	M20	24.0	28.7	42	4.7	39	13	26	25	103	**943.77**
DCUS-33	400	M20	28.0	33.2	49	5.2	44	18	27	27	116	**1,284.25**
DCUS-34	500	M20	30.0	36.0	53	6.0	48	18	27	27	120	**1,716.23**
DCUS-35	630	M20	35.0	41.5	61	6.5	55	18	33	31	137	**2,406.77**
DCUS-62	800	-	39.0	46.3	67	7.3	65	25	38	37	165	**3,961.27**
DCUS-76	1000	-	43.0	53.8	76	10.8	90	30	45	45	210	**8,738.63**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow


COPPER TUBE TERMINALS HEAVY DUTY LONG BARREL



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned

The extra long barrel allows more crimps then usual in high stress areas, such as high voltage termination.



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	H	G	J	Dew price (₹)
DCUS-282	25	M8	7.0	9.0	13	2.0	16	5	12	8	41	**41.50**
DCUS-283	35	M8	8.0	10.6	15	2.6	20	5	14	9	48	**88.31**
DCUS-284	50	M8	9.2	12.2	17	3.0	26	7	16	10	59	**145.77**
DCUS-285	70	M10	11.5	15.0	20	3.5	28	7	19	12	66	**224.50**
DCUS-286	95	M12	12.8	17.0	24	4.2	32	10	20	12	74	**351.12**
DCUS-287	120	M12	14.8	19.6	28	4.8	35	10	23	14	82	**499.02**
DCUS-288	150	M12	16.0	21.2	30	5.2	38	10	24	14	86	**614.99**
DCUS-289	185	M12	18.0	24.0	34	6.0	43	12	23	17	95	**890.57**
DCUS-290	240	M16	22.0	28.0	40	6.0	50	12	30	20	112	**1,249.14**
DCUS-291	300	M16	24.0	31.0	44	7.0	54	12	32	20	120	**1,647.07**
DCUS-292	400	M20	28.0	36.0	52	8.4	67	16	32	24	139	**2,509.98**
DCUS-293	500	M21	30.0	41.0	58	11.0	80	20	34	22	156	**4,456.03**
DCUS-294	630	M21	35.0	46.0	66	11.0	93	22	38	28	181	**5,936.06**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

COPPER TUBE TERMINALS HEAVY DUTY LONG BARREL

COPPER REDUCER TERMINALS



Technical Data :


All Dimension are in MM


Material : EC Grade Copper : IS 191/BS EN 13600

Tolerances : +/-5%

Finish : Electro Tinned

Reduce terminals are specially made for terminating large cable to circuit breakers.





DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	ØD	D1	B	K	G+H	J	Dew price (₹)
DWPC-7	2.5	2.5	4.7	3.8	3.3	6	4	10	20	**32.98**
DWPC-16	4.0	2.8	4.7	3.8	3.3	6	4	10	20	**32.98**
DWPC-18	6.0	3.1	4.7	3.8	3.3	6	4	10	20	**32.98**
DWPC-20	10	3.8	5.5	3.8	3.3	9	4	10	23	**39.37**
DWPC-22	10	4.4	6.2	3.8	3.3	9	4	10	23	**41.50**
DWPC-2	16	5.3	7.1	3.8	3.3	13	4	13	30	**58.52**
DWPC-25	25	7.0	9.0	6.0	5.5	12	5	15	32	**89.38**
DWPC-4	35	8.0	10.0	7.5	6.5	12	5	20	37	**129.81**
DWPC-26	50	9.2	11.2	7.5	6.5	16	5	20	41	**143.64**
DWPC-27	70	11.3	13.8	7.5	6.5	18	5	20	43	**200.03**
DWPC-29	95	12.8	15.6	11.5	10.5	20	6	25	51	**320.26**
DWPC-35	120	14.8	17.8	11.5	10.5	22	6	32	60	**449.01**
DWPC-37	150	16.0	19.6	11.5	10.5	26	6	32	64	**547.96**
DWPC-38	185	18.0	22.0	11.5	10.5	32	6	32	70	**720.33**
DWPC-39	225	20.0	26.0	15.6	14.0	38	8	32	78	**1,174.66**
DWPC-43	240	21.2	26.0	15.6	14.0	38	8	32	78	**1,125.71**
DWPC-45	300	24.0	28.7	16.0	15.0	42	8	42	92	**1,424.70**
DWPC-101	400	27.0	33.2	15.6	14.0	46	12	32	90	**2,896.21**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT


Dewconect®
Together We Grow

COPPER TUBE TERMINALS HEAVY DUTY OPEN AT K



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned

E-bolt hole can be customized on request.



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	H	G	J	Dew price (₹)
DCUS-538	1.5	5.20	1.8	3.7	8	1.0	5	2	5	4	16	**10.36**
DCUS-539	1.5	6.50	1.8	3.7	10	0.8	5	2	6	5	18	**10.36**
DCUS-388	2.5	4.20	2.4	4.0	8	1.0	7	2	5	4	18	**11.85**
DCUS-540	2.5	5.20	2.4	4.0	10	0.8	7	2	6	5	20	**11.85**
DCUS-541	2.5	6.50	2.4	4.0	10	0.8	7	2	6	5	20	**11.85**
DCUS-389	4.0	5.20	3.1	4.8	10	1.0	7	2	6	5	20	**14.80**
DCUS-543	4.0	6.50	3.1	4.8	10	1.0	7	2	6	5	20	**14.80**
DCUS-390	6.0	5.20	3.8	5.5	10	1.2	9	3	6	5	23	**16.28**
DCUS-544	6.0	6.50	3.8	5.5	12	1.0	9	3	9	6	27	**16.28**
DCUS-545	6.0	8.40	3.8	5.5	12	1.0	9	3	9	6	27	**16.28**
DCUS-353	10	6.50	4.5	6.2	12	1.2	9	3	7	6	25	**19.25**
DCUS-547	10	8.40	4.5	6.2	12	1.2	9	3	9	6	27	**19.25**
DCUS-354	16	6.50	5.4	7.1	12	1.4	12	4	7	7	30	**25.17**
DCUS-549	16	8.40	5.4	7.1	12	1.4	12	4	9	7	32	**25.17**
DCUS-550	20	8.40	6.0	7.7	12	1.7	12	4	9	7	32	**27.66**
DCUS-355	25	6.50	6.8	8.8	13	2.0	12	4	7	7	30	**39.37**
DCUS-551	25	8.40	6.8	8.8	18	1.4	12	4	11	10	37	**39.37**
DCUS-552	25	10.50	6.8	8.8	18	1.4	12	4	11	10	37	**39.37**
DCUS-542	35	6.50	8.2	10.6	15	2.4	12	5	9	9	35	**70.22**
DCUS-356	35	8.40	8.2	10.6	15	2.4	12	5	9	9	35	**70.22**
DCUS-554	35	10.50	8.2	10.6	18	2.0	12	5	11	10	38	**70.22**
DCUS-357	50	8.40	9.5	12.4	18	2.9	16	6	11	10	43	**109.59**
DCUS-556	50	10.50	9.5	12.4	18	2.9	16	6	11	10	43	**109.59**
DCUS-557	70	8.40	11.2	14.7	21	3.5	18	7	13	12	50	**177.69**
DCUS-358	70	10.50	11.2	14.7	21	3.5	18	7	13	12	50	**177.69**
DCUS-559	70	13.00	11.2	14.7	21	3.5	18	7	13	12	50	**177.69**
DCUS-359	95	10.50	13.5	17.4	25	3.9	20	9	13	13	55	**252.17**
DCUS-561	95	13.00	13.5	17.4	25	3.9	20	9	13	13	55	**252.17**
DCUS-241	120	13.00	15.0	19.4	28	4.4	22	10	14	14	60	**326.65**
DCUS-546	120	17.00	15.0	19.4	28	4.4	22	10	16	16	64	**326.65**
DCUS-242	150	13.00	16.5	21.2	30	4.7	26	11	16	16	69	**407.51**
DCUS-564	150	17.00	16.5	21.2	30	4.7	26	11	16	16	69	**407.51**
DCUS-243	185	17.00	18.5	23.5	34	5.0	32	12	17	17	78	**633.08**
DCUS-244	240	17.00	21.0	26.5	38	5.5	38	14	20	20	92	**853.33**
DCUS-567	240	21.00	21.0	26.5	38	5.5	38	14	20	20	92	**853.33**
DCUS-245	300	17.00	23.5	30.0	43	6.5	42	15	22	22	101	**1,239.56**
DCUS-569	300	21.00	23.5	30.0	43	6.5	42	15	22	22	101	**1,239.56**
DCUS-246	400	17.00	26.8	34.8	50	8.0	44	18	26	26	114	**1,992.87**
DCUS-571	400	21.00	26.8	34.8	50	8.0	44	18	26	26	114	**1,992.87**
DCUS-247	500	21.00	30.0	39.0	56	9.0	48	20	28	28	124	**2,661.06**
DCUS-573	550	21.00	31.7	41.4	60	9.7	52	20	30	30	132	**3,243.07**
DCUS-248	630	21.00	35.0	45.0	65	10.0	56	22	33	33	144	**3,991.06**
DCUS-599	800	-	39.0	50.6	73	11.6	78	17	40	35	170	**6,935.15**
DCUS-590	1000	-	43.0	56.2	81	13.2	90	20	45	45	200	**9,866.47**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

COPPER TUBE IN - LINE CONNECTORS



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned



DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	J	Dew price (₹)
DEH-453	1.5	1.6	3.2	15	**7.40**
DCB-41	1.5	1.8	3.7	12	**7.40**
DEH-454	2.5	2.4	4.0	15	**7.40**
DCB-3	4.0	3.1	4.8	15	**8.88**
DEH-455	4.6	3.5	5.5	15	**13.33**
DCB-4	6.0	3.8	5.5	15	**10.36**
DEH-460	10	4.5	6.2	20	**14.80**
DCB-6	16	5.4	7.1	20	**16.28**
DCB-47	20	6.0	7.7	22	**25.17**
DCB-24	25	6.8	8.8	32	**39.37**
DCB-25	35	8.2	10.6	36	**70.22**
DCB-26	50	9.5	12.4	40	**107.46**
DCB-51	70	11.2	14.7	40	**179.82**
DCB-52	95	13.5	17.4	45	**233.02**
DCB-53	120	15.0	19.4	45	**274.51**
DCB-54	150	16.5	21.2	55	**388.36**
DCB-55	185	18.5	23.5	65	**532.00**
DCB-56	240	21.0	26.5	80	**815.02**
DCB-57	300	23.5	30.0	85	**1,158.70**
DCB-58	400	26.8	34.8	90	**1,706.66**
DCB-59	500	30.0	39.0	100	**2,495.08**
DCB-60	550	31.7	41.4	100	**3,633.56**
DCB-61	630	35.0	45.0	110	**3,693.14**
DCB-42	800	39.0	50.6	150	**7,937.44**
DCB-43	1000	43.0	56.2	170	**9,246.16**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

COPPER TUBE IN - LINE CONNECTORS - LONG BARREL



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned



DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	J	Dew price (₹)
DCBL-453	1.5	1.6	3.2	23	**11.85**
DCBL-23	2.5	2.0	3.7	23	**13.33**
DCBL-3	4.0	3.1	4.8	23	**14.80**
DCBL-4	6.0	3.8	5.5	23	**20.73**
DCBL-460	10	4.4	6.2	30	**32.98**
DCBL-6	16	5.3	7.1	30	**N/A**
DCBL-7	25	7.0	9.0	38	**N/A**
DCBL-8	35	8.0	10.0	45	**82.99**
DCBL-9	50	9.2	11.2	53	**N/A**
DCBL-10	70	11.6	13.8	60	**N/A**
DCBL-11	95	12.8	15.6	68	**267.06**
DCBL-12	120	14.8	17.8	75	**313.88**
DCBL-13	150	16.0	19.6	83	**525.62**
DCBL-14	185	18.0	22.0	90	**709.69**
DCBL-20	225	20.0	24.0	98	**705.43**
DCBL-15	240	22.0	26.0	98	**907.59**
DCBL-16	300	24.0	28.7	113	**N/A**
DCBL-17	400	28.0	33.2	135	**1,960.95**
DCBL-18	500	30.0	36.0	143	**3,467.58**
DCBL-19	630	35.0	41.5	158	**4,246.42**
DCBL-21	800	39.0	46.3	180	**9,128.06**
DCBL-22	1000	43.0	53.8	225	**10,632.55**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow


COPPER TUBE TERMINALS (MEDIUM DUTY) - LONG BARREL



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned

The extra long barrel allows more crimps then usual in high stress areas, such as high voltage termination.



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	H	G	J	Dew price (₹)
DCEB-05	2.5	M5	2.0	3.7	9	1.0	10.5	3	5	5	23.5	**11.85**
DCEB-06	4.0	M6	3.1	4.8	11	1.0	10.5	3	6	6	25.5	**17.77**
DCEB-07	6.0	M6	3.8	5.5	11	1.0	13.5	3	6	6	28.5	**19.25**
DCEB-08	10	M6	4.4	6.2	11	1.3	13.5	3	6	6	28.5	**23.69**
DCEB-09	16	M6	5.3	7.1	11	1.6	18.0	4	8	6	36.0	**40.43**
DCEB-10	25	M6	7.0	9.0	13	2.0	18.0	5	12	8	43.0	**52.14**
DCEB-11	35	M6	8.0	10.0	15	2.0	18.0	5	12	8	43.0	**73.42**
DCEB-12	35	M8	8.0	10.0	15	2.0	18.0	5	12	8	43.0	**73.42**
DCEB-13	50	M6	9.2	11.2	16	2.0	24.0	8	11	10	53.0	**93.63**
DCEB-14	50	M8	9.2	11.2	16	2.0	24.0	8	11	10	53.0	**93.63**
DCEB-15	50	M10	9.2	11.2	16	2.0	24.0	8	11	10	53.0	**93.63**
DCEB-16	70	M8	11.6	13.8	20	2.2	27.0	10	15	13	65.0	**153.22**
DCEB-17	70	M10	11.6	13.8	20	2.2	27.0	10	15	13	65.0	**153.22**
DCEB-18	70	M12	11.6	13.8	20	2.2	27.0	10	15	13	65.0	**153.22**
DCEB-19	95	M10	12.8	15.6	23	2.8	30.0	10	15	13	68.0	**198.97**
DCEB-20	95	M12	12.8	15.6	23	2.8	30.0	10	15	13	68.0	**198.97**
DCEB-21	120	M10	14.8	17.8	26	3.0	33.0	10	16	14	73.0	**270.26**
DCEB-22	120	M12	14.8	17.8	26	3.0	33.0	10	16	14	73.0	**270.26**
DCEB-23	120	M16	14.8	17.8	26	3.0	33.0	10	16	14	73.0	**270.26**
DCEB-24	150	M10	16.0	19.6	28	3.6	39.0	11	18	15	83.0	**388.36**
DCEB-25	150	M12	16.0	19.6	28	3.6	39.0	11	18	15	83.0	**388.36**
DCEB-26	150	M16	16.0	19.6	28	3.6	39.0	11	18	15	83.0	**388.36**
DCEB-27	185	M12	18.0	22.0	32	4.0	45.0	11	21	21	98.0	**567.11**
DCEB-28	185	M16	18.0	22.0	32	4.0	45.0	11	21	21	98.0	**567.11**
DCEB-231	225	M16	20.0	24.0	32	4.0	51.0	13	24	24	112.0	**713.94**
DCEB-29	240	M16	22.0	26.0	35	4.0	54.0	13	24	24	115.0	**780.98**
DCEB-30	240	M20	22.0	26.0	38	4.0	54.0	13	24	24	115.0	**780.98**
DCEB-31	300	M16	24.0	28.7	42	4.7	58.0	13	26	25	122.0	**1,079.96**
DCEB-32	300	M20	24.0	28.7	42	4.7	58.0	13	26	25	122.0	**1,079.96**
DCEB-33	400	M20	28.0	33.2	49	5.2	66.0	18	27	27	138.0	**1,564.08**
DCEB-34	500	M20	30.0	36.0	53	6.0	72.0	18	27	27	144.0	**2,107.78**
DCEB-35	630	M20	35.0	41.5	61	6.5	83.0	18	33	31	165.0	**2,934.51**
DCEB-62	800	-	39.0	46.3	67	7.3	98.0	25	38	37	198.0	**4,645.42**
DCEB-76	1000	-	43.0	53.8	76	10.8	135.0	30	45	45	255.0	**10,621.91**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

COPPER TUBE TERMINALS : DIN 46235



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned

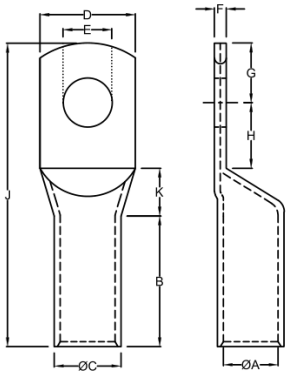

DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	H	G	J	Dew price (₹)
DIN 6-5	6.0	M5	3.8	5.5	9	10	7.5	6.5	30.5	**27.66**
DIN 6-6	6.0	M6	3.8	5.5	9	10	8.0	7.5	31.5	**27.66**
DIN 6-8	6.0	M8	3.8	5.5	13	10	10.0	10.0	34.0	**27.66**
DIN 10-5	10	M5	4.5	6.0	9	10	8.5	7.0	34.0	**27.66**
DIN 10-6	10	M6	4.5	6.0	9	10	8.5	7.5	34.5	**27.66**
DIN 10-8	10	M8	4.5	6.0	13	10	10.0	10.0	37.0	**27.66**
DIN 16-6	16	M6	5.5	8.5	13	20	8.0	7.5	43.5	**96.82**
DIN 16-8	16	M8	5.5	8.5	13	20	10.0	10.0	46.0	**96.82**
DIN 16-10	16	M10	5.5	8.5	17	20	12.0	12.0	48.0	**96.82**
DIN 16-12	16	M12	5.5	8.5	18	20	13.0	13.0	49.0	**96.82**
DIN 25-6	25	M6	7.0	10.0	14	20	8.0	7.5	45.5	**122.36**
DIN 25-8	25	M8	7.0	10.0	16	20	10.0	10.0	48.0	**122.36**
DIN 25-10	25	M10	7.0	10.0	17	20	12.0	12.0	50.0	**122.36**
DIN 25-12	25	M12	7.0	10.0	19	20	13.0	13.0	51.0	**122.36**
DIN 35-6	35	M6	8.2	12.5	17	20	8.0	7.5	49.5	**236.21**
DIN 35-8	35	M8	8.2	12.5	17	20	10.0	10.0	52.0	**236.21**
DIN 35-10	35	M10	8.2	12.5	19	20	12.0	12.0	54.0	**236.21**
DIN 35-12	35	M12	8.2	12.5	21	20	13.0	13.0	55.0	**236.21**
DIN 35-14	35	M14	8.2	12.5	21	20	14.5	14.5	56.5	**236.21**
DIN 50-8	50	M8	10.0	14.5	20	28	10.0	10.0	62.0	**351.12**
DIN 50-10	50	M10	10.0	14.5	22	28	12.0	12.0	64.0	**351.12**
DIN 50-12	50	M12	10.0	14.5	24	28	13.0	13.0	65.0	**351.12**
DIN 50-14	50	M14	10.0	14.5	24	28	14.5	14.5	66.5	**351.12**
DIN 50-16	50	M16	10.0	14.5	28	28	16.0	16.0	68.0	**351.12**
DIN 70-8	70	M8	11.5	16.5	24	28	10.0	10.0	65.0	**462.84**
DIN 70-10	70	M10	11.5	16.5	24	28	12.0	12.0	67.0	**462.84**
DIN 70-12	70	M12	11.5	16.5	24	28	13.0	13.0	68.0	**462.84**
DIN 70-14	70	M14	11.5	16.5	24	28	14.5	14.5	69.5	**462.84**
DIN 70-16	70	M16	11.5	16.5	30	28	16.0	16.0	71.0	**462.84**
DIN 95-8	95	M8	13.5	19.0	28	35	12.0	12.0	77.0	**676.70**
DIN 95-10	95	M10	13.5	19.0	28	35	12.0	12.0	77.0	**676.70**
DIN 95-12	95	M12	13.5	19.0	28	35	13.0	13.0	78.0	**676.70**
DIN 95-14	95	M14	13.5	19.0	28	35	14.5	14.5	79.5	**676.70**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

COPPER TUBE TERMINALS : DIN 46235



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned

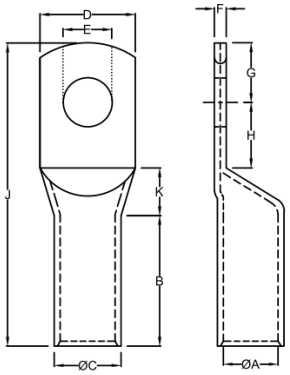

DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	H	G	J	Dew price (₹)
DIN 95-16	95	M16	13.5	19.0	32	35	16.0	16.0	81.0	**676.70**
DIN 120-10	120	M10	15.5	21.0	32	35	16.0	15.0	85.0	**992.71**
DIN 120-12	120	M12	15.5	21.0	32	35	17.0	16.0	86.0	**992.71**
DIN 120-14	120	M14	15.5	21.0	32	35	18.0	18.0	88.0	**992.71**
DIN 120-16	120	M16	15.5	21.0	32	35	20.0	19.0	89.0	**992.71**
DIN 120-20	120	M20	15.5	21.0	32	38	22.0	21.0	91.0	**992.71**
DIN 150-10	150	M10	17.0	23.5	34	35	16.0	15.0	93.0	**1,211.90**
DIN 150-12	150	M12	17.0	23.5	34	35	17.0	16.0	94.0	**1,211.90**
DIN 150-14	150	M14	17.0	23.5	34	35	20.0	19.0	97.0	**1,211.90**
DIN 150-16	150	M16	17.0	23.5	34	35	20.0	19.0	97.0	**1,211.90**
DIN 150-20	150	M20	17.0	23.5	40	35	22.0	21.0	99.0	**1,211.90**
DIN 185-10	185	M10	19.0	25.5	37	40	16.0	15.0	97.0	**1,507.69**
DIN 185-12	185	M12	19.0	25.5	37	40	17.0	16.0	98.0	**1,507.69**
DIN 185-14	185	M14	19.0	25.5	37	40	20.0	19.0	101.0	**1,507.69**
DIN 185-16	185	M16	19.0	25.5	37	40	20.0	19.0	101.0	**1,507.69**
DIN 185-20	185	M20	19.0	25.5	40	40	22.0	21.0	103.0	**1,507.69**
DIN 240-12	240	M12	21.5	29.0	42	40	17.0	16.0	108.0	**2,487.63**
DIN 240-14	240	M14	21.5	29.0	42	40	20.0	19.0	111.0	**2,487.63**
DIN 240-16	240	M16	21.5	29.0	42	40	20.0	19.0	111.0	**2,487.63**
DIN 240-20	240	M20	21.5	29.0	42	40	22.0	21.0	113.0	**2,487.63**
DIN 300-14	300	M14	24.5	32.0	48	50	22.0	19.0	119.0	**3,106.88**
DIN 300-16	300	M16	24.5	32.0	48	50	22.0	19.0	119.0	**3,106.88**
DIN 300-20	300	M20	24.5	32.0	48	50	22.0	22.0	122.0	**3,106.88**
DIN 400-14	400	M14	27.5	38.5	55	70	25.0	25.0	140.0	**5,019.95**
DIN 400-16	400	M16	27.5	38.5	55	70	25.0	25.0	140.0	**5,019.95**
DIN 400-20	400	M20	27.5	38.5	55	70	25.0	25.0	140.0	**5,019.95**
DIN 500-16	500	M16	31.0	42.0	60	70	25.0	25.0	150.0	**7,237.33**
DIN 500-20	500	M20	31.0	42.0	60	70	25.0	25.0	150.0	**7,237.33**
DIN 625-16	625	M16	34.5	44.0	60	80	25.0	25.0	160.0	**7,237.33**
DIN 625-20	625	M20	34.5	44.0	60	80	25.0	25.0	160.0	**7,237.33**
DIN 800-16	800	M16	40.0	52.0	75	100	30.0	30.0	195.0	**12,928.66**
DIN 800-20	800	M20	40.0	52.0	75	100	30.0	30.0	195.0	**12,928.66**
DIN 1000-21	1000	M21	44.0	58.0	85	100	20.0	25.0	190.0	**16,286.65**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT


Dewconect®
Together We Grow

ALUMINIUM TUBE TERMINALS



Technical Data :
Material : EC Grade Aluminium : IS : 5082
Type Tested : BS EN/IEC - 61238
Conductivity : 61% IACS
Operating Temp : -20°C to 140°C
Finish : Natural
Aluminium alloy & temper 19501 (ELE) As Per : IS - 5082 : 1998

Serrating is provided inside the barrel portion of terminals to increase contact surface area & Mechanical Strength.



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	G+H	J	Dew price (₹)
DALS-151	2.5	M3	2.0	5.5	7	3.5	7	3	8	18	**3.87**
DALS-309	2.5	M3.5	2.6	5.5	7	2.9	7	3	8	18	**3.87**
DALS-155	4.0	M4	2.9	5.5	7	2.6	7	3	8	18	**3.87**
DALS-317	4	M5	2.9	5.5	12	1.2	7	4	13	24	**3.87**
DALS-158	6	M5	3.5	5.5	8	2.0	7	4	13	24	**3.87**
DALS-313	6	M6	3.5	5.5	12	1.1	7	4	13	24	**3.87**
DALS-214	10	M6	4.4	7.4	10	2.8	9	4	17	30	**5.15**
DALS-215	10	M8	4.4	7.4	15	1.8	9	4	17	30	**5.15**
DALS-252	16	M6	5.4	8.3	11	2.9	13	4	20	37	**6.44**
DALS-216	16	M8	5.4	8.3	11	2.9	13	4	20	37	**6.44**
DALS-217	16	M10	5.4	8.3	18	1.8	13	4	20	37	**6.44**
DALS-218	25	M8	7.0	10.0	14	3.0	16	7	21	44	**9.02**
DALS-219	25	M10	7.0	10.0	20	1.7	16	7	21	44	**9.02**
DALS-220	25	M12	7.0	10.0	20	1.7	16	7	21	44	**9.02**
DALS-221	35	M8	8.0	10.8	15	2.8	18	7	22	47	**10.30**
DALS-222	35	M10	8.0	10.8	15	2.1	18	7	22	47	**10.30**
DALS-255	50	M8	9.3	13.0	18	3.7	22	8	24	54	**15.45**
DALS-312	50	M10	9.3	13.0	23	2.8	22	8	24	54	**15.45**
DALS-224	50	M12	9.3	13.0	23	2.8	22	8	24	54	**15.45**
DALS-256	70	M8	11.6	16.0	22	4.4	26	8	26	60	**24.46**
DALS-225	70	M10	11.6	16.0	22	4.4	26	8	26	60	**24.46**
DALS-226	70	M12	11.6	16.0	22	4.4	26	8	26	60	**24.46**
DALS-227	95	M10	12.9	17.1	25	4.2	28	8	28	64	**32.98**
DALS-228	95	M12	12.9	17.1	25	4.2	28	8	28	64	**32.98**
DALS-229	95	M16	12.9	17.1	25	4.2	28	8	28	64	**32.98**
DALS-257	120	M10	14.8	19.6	28	4.8	32	11	30	73	**44.69**
DALS-230	120	M12	14.8	19.6	28	4.8	32	11	30	73	**44.69**
DALS-231	120	M16	14.8	19.6	28	4.8	32	11	30	73	**44.69**
DALS-258	150	M10	16.1	21.2	31	5.1	34	11	34	79	**58.52**
DALS-232	150	M12	16.1	21.2	31	5.1	34	11	34	79	**58.52**
DALS-233	150	M16	16.1	21.2	31	5.1	34	11	34	79	**58.52**
DALS-311	185	M10	18.0	23.7	34	5.7	36	12	36	84	**77.67**
DALS-234	185	M12	18.0	23.7	34	5.7	36	12	36	84	**77.67**
DALS-235	185	M16	18.0	23.7	34	5.7	36	12	36	84	**77.67**
DALS-320	225	M12	20.6	27.0	39	6.4	40	14	40	94	**111.72**
DALS-236	240	M12	22.0	28.0	40	6.0	44	14	44	102	**127.68**
DALS-237	240	M16	22.0	28.0	40	6.0	44	14	44	102	**127.68**
DALS-300	300	M16	24.0	31.0	45.7	7.0	47	14	54	115	**210.67**
DALS-259	300	M20	24.0	31.0	45.7	7.0	47	14	54	115	**210.67**
DALS-260	400	M20	28.0	36.0	51	8.0	56	13	61	130	**260.68**
DALS-296	500	M20	30.0	41.0	58	11.0	60	15	65	140	**408.58**
DALS-261	630	M20	35.0	46.0	66	11.0	69	16	69	154	**529.87**
DALS-318	800	-	39.0	51.0	73	12.0	77	25	78	180	**838.43**
DALS-319	1000	-	43.5	57.0	81	13.5	100	30	90	220	**1,222.54**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

ALUMINIUM IN - LINE CONNECTORS



Technical Data :
Material : EC Grade Aluminium : IS : 5082
Type Tested : BS EN/IEC - 61238
Conductivity : 61% IACS
Operating Temp : -20°C to 140°C
Finish : Natural
Aluminium alloy & temper 19501 (ELE) As Per : IS - 5082 : 1998

Serrating is provided inside the barrel portion of terminals to increase contact surface area & Mechanical Strength.



DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	J	Dew price (₹)
DALS-6	2.5	2.6	5.5	16	**2.57**
DALS-5	4.0	2.9	5.5	16	**2.57**
DALS-13	6.0	3.5	5.5	16	**2.57**
DALS-14	10	4.4	7.4	20	**3.87**
DALS-4	16	5.4	8.3	26	**5.15**
DALS-3	25	7.0	10.0	35	**7.72**
DALS-2	35	8.0	10.8	40	**9.02**
DALS-12	50	9.3	13.0	45	**16.74**
DALS-1	70	11.6	16.0	55	**27.66**
DALS-15	95	12.9	17.1	60	**31.92**
DALS-9	120	14.8	19.6	65	**44.69**
DALS-10	150	16.1	21.2	70	**53.20**
DALS-11	185	18.0	23.7	75	**67.03**
DALS-147	225	20.6	27.0	85	**103.21**
DALS-16	240	22.0	28.0	90	**105.34**
DALS-17	300	24.0	31.0	100	**155.34**
DALS-18	400	28.0	36.0	115	**234.08**
DALS-19	500	30.0	41.0	125	**373.46**
DALS-20	630	35.0	46.0	140	**479.86**
DALS-148	800	39.0	51.0	160	**665.00**
DALS-149	1000	43.5	57.0	210	**1,108.69**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

ALUMINIUM TUBE TERMINALS - LONG BARREL



Technical Data :
Material : EC Grade Aluminium : IS : 5082
Type Tested : BS EN/IEC - 61238
Conductivity : 61% IACS
Operating Temp : -20°C to 140°C
Finish : Natural
Aluminium alloy & temper 19501 (ELE) As Per : IS - 5082 : 1998
Serrating is provided inside the barrel portion of terminals to increase contact surface area & Mechanical Strength.
The extra long barrel allows more crimps then usual in high stress areas, such as high voltage termination.



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	G+H	J	Dew price (₹)
DALS-551	2.5	M3	2.0	5.5	7	3.5	10.5	3	8	21.5	**5.15**
DALS-509	2.5	M3.5	2.6	5.5	7	2.9	10.5	3	8	21.5	**5.15**
DALS-555	4.0	M4	2.9	5.5	7	2.6	10.5	3	8	21.5	**5.15**
DALS-517	4	M5	2.9	5.5	12	1.2	10.5	4	13	27.5	**5.15**
DALS-558	6	M5	3.5	5.5	8	2.0	10.5	4	13	27.5	**5.15**
DALS-513	6	M6	3.5	5.5	12	1.1	10.5	4	13	27.5	**5.15**
DALS-514	10	M6	4.4	7.4	10	2.8	13.5	4	17	34.5	**6.44**
DALS-515	10	M8	4.4	7.4	15	1.8	13.5	4	17	34.5	**6.44**
DALS-552	16	M6	5.4	8.3	11	2.9	19.5	4	20	43.5	**7.72**
DALS-516	16	M8	5.4	8.3	11	2.9	19.5	4	20	43.5	**7.72**
DALS-617	16	M10	5.4	8.3	18	1.8	19.5	4	20	43.5	**7.72**
DALS-518	25	M8	7.0	10.0	14	3.0	24.0	7	21	52.0	**10.30**
DALS-519	25	M10	7.0	10.0	20	1.7	24.0	7	21	52.0	**10.30**
DALS-520	25	M12	7.0	10.0	20	1.7	24.0	7	21	52.0	**10.30**
DALS-521	35	M8	8.0	10.8	15	2.8	27.0	7	22	56.0	**12.87**
DALS-522	35	M10	8.0	10.8	15	2.1	27.0	7	22	56.0	**12.87**
DALS-655	50	M8	9.3	13.0	18	3.7	33.0	8	24	65.0	**19.31**
DALS-512	50	M10	9.3	13.0	23	2.8	33.0	8	24	65.0	**19.31**
DALS-524	50	M12	9.3	13.0	23	2.8	33.0	8	24	65.0	**19.31**
DALS-556	70	M8	11.6	16.0	22	4.4	39.0	8	26	73.0	**39.37**
DALS-525	70	M10	11.6	16.0	22	4.4	39.0	8	26	73.0	**39.37**
DALS-526	70	M12	11.6	16.0	22	4.4	39.0	8	26	73.0	**39.37**
DALS-527	95	M10	12.9	17.1	25	4.2	42.0	8	28	78.0	**40.43**
DALS-528	95	M12	12.9	17.1	25	4.2	42.0	8	28	78.0	**40.43**
DALS-529	95	M16	12.9	17.1	25	4.2	42.0	8	28	78.0	**40.43**
DALS-557	120	M10	14.8	19.6	28	4.8	48.0	11	30	89.0	**58.52**
DALS-530	120	M12	14.8	19.6	28	4.8	48.0	11	30	89.0	**58.52**
DALS-531	120	M16	14.8	19.6	28	4.8	48.0	11	30	89.0	**58.52**
DALS-658	150	M10	16.1	21.2	31	5.1	51.0	11	34	96.0	**72.35**
DALS-532	150	M12	16.1	21.2	31	5.1	51.0	11	34	96.0	**72.35**
DALS-533	150	M16	16.1	21.2	31	5.1	51.0	11	34	96.0	**72.35**
DALS-511	185	M10	18.0	23.7	34	5.7	54.0	12	36	102.0	**95.76**
DALS-534	185	M12	18.0	23.7	34	5.7	54.0	12	36	102.0	**95.76**
DALS-535	185	M16	18.0	23.7	34	5.7	54.0	12	36	102.0	**95.76**
DALS-620	225	M12	20.6	27.0	39	6.4	60.0	14	40	114.0	**137.26**
DALS-536	240	M12	22.0	28.0	40	6.0	66.0	14	44	124.0	**155.34**
DALS-537	240	M16	22.0	28.0	40	6.0	66.0	14	44	124.0	**155.34**
DALS-500	300	M16	24.0	31.0	45.7	7.0	70.5	14	54	138.5	**225.57**
DALS-559	300	M20	24.0	31.0	45.7	7.0	70.5	14	54	138.5	**225.57**
DALS-560	400	M20	28.0	36.0	51	8.0	84.0	13	61	158.0	**324.52**
DALS-596	500	M20	30.0	41.0	58	11.0	90.0	15	65	170.0	**519.23**
DALS-561	630	M20	35.0	46.0	66	11.0	103.5	16	69	188.5	**673.51**
DALS-618	800	-	39.0	51.0	73	12.0	115.5	25	78	218.5	**1,007.61**
DALS-619	1000	-	43.5	57.0	81	13.5	150.0	30	90	270.0	**1,509.82**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

ALUMINIUM IN - LINE CONNECTORS FOR XLPE CONDUCTORS



Technical Data :
Material : EC Grade Aluminium : IS : 5082
Type Tested : BS EN/IEC - 61238
Conductivity : 61% IACS
Operating Temp : -20°C to 140°C
Finish : Natural
Aluminium alloy & temper 19501 (ELE) As Per : IS - 5082 : 1998



DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	J	Dew price (₹)
DALS-XL1	25	7.2	9.6	82	**14.16**
DALS-XL2	35	8.3	11.1	90	**21.89**
DALS-XL3	50	10.1	13.5	100	**34.05**
DALS-XL4	70	10.2	14.5	104	**46.82**
DALS-XL5	95	12.0	16.9	108	**64.90**
DALS-XL6	120	13.7	19.0	112	**81.93**
DALS-XL7	150	15.1	21.2	116	**108.53**
DALS-XL8	185	16.6	23.9	128	**162.79**
DALS-XL9	225	18.6	26.1	136	**213.86**
DALS-XL10	240	19.3	27.2	148	**226.63**
DALS-XL11	300	21.8	30.2	160	**295.79**
DALS-XL12	400	25.0	34.8	182	**351.12**
DALS-XL13	500	28.2	39.1	190	**442.62**
DALS-XL14	630	31.7	44.4	200	**811.83**
DALS-XL15	800	35.7	49.5	225	**1,111.88**
DALS-XL16	1000	41.0	56.0	250	**1,530.03**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT


Dewconect®
Together We Grow

ALUMINIUM TERMINALS FOR AL-XLPE CONDUCTORS



Technical Data :

Material : EC Grade Aluminium : IS : 5082
Type Tested : BS EN/IEC - 61238
Conductivity : 61% IACS
Operating Temp : -20°C to 140°C
Finish : Natural
Aluminium alloy & temper 19501 (ELE) As Per : IS - 5082 : 1998



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	H	G	J	Dew price (₹)
DALS-XL17	25	8.2	7.2	9.6	14.0	2.4	41	7	12	9	69	**15.19**
DALS-XL18	35	8.2	8.3	11.1	16.0	2.8	50	7	11	11	79	**23.17**
DALS-XL19	50	10.2	10.1	13.5	19.5	3.4	49	8	13	11	81	**36.18**
DALS-XL20	70	10.2	10.2	14.5	20.5	4.3	62	8	13	13	96	**48.94**
DALS-XL21	95	12.7	12.0	16.9	23.5	4.9	73	8	14	14	109	**72.35**
DALS-XL22	120	12.7	13.7	19.0	26.5	5.3	73	11	15	15	114	**91.50**
DALS-XL23	150	12.7	15.1	21.2	29.5	6.1	83	11	17	17	128	**131.94**
DALS-XL24	185	12.7	16.6	23.9	33.0	7.3	83	12	18	18	131	**174.50**
DALS-XL25	225	12.7	18.6	26.1	36.0	7.5	86	14	20	20	140	**231.95**
DALS-XL26	240	12.7	19.3	27.2	37.5	7.9	86	14	22	22	144	**253.23**
DALS-XL27	300	20.3	21.8	30.2	42.0	8.4	89	14	27	27	157	**335.16**
DALS-XL28	400	20.3	25.0	34.8	48.0	9.8	113	13	30	30	186	**386.23**
DALS-XL29	500	20.3	28.2	39.1	54.0	10.9	125	15	32	32	204	**518.17**
DALS-XL30	630	20.3	31.7	44.4	61.0	12.7	140	16	34	34	224	**1,072.51**
DALS-XL31	800	20.3	35.7	49.5	68.0	13.8	147	25	39	39	250	**1,333.19**
DALS-XL32	1000	20.3	41.0	56.0	77.5	15.0	150	30	45	45	280	**1,844.98**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

ALUMINUM REDUCER TERMINALS



Technical Data :
Material : EC Grade Aluminium : IS : 5082
Type Tested : BS EN/IEC - 61238
Conductivity : 61% IACS
Operating Temp : -20°C to 140°C
Finish : Natural
Aluminium alloy & temper 19501 (ELE) As Per : IS - 5082 : 1998
Reduce terminals are specially made for terminating large cable to circuit breakers.



DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	ØD	D1	B	K	G+H	J	Dew price (₹)
DAWP-1	2.5	2.0	5.5	4.5	4.0	7	4	10	21	**14.16**
DAWP-7	2.5	2.6	5.5	3.8	3.3	7	4	10	21	**14.16**
DAWP-15	4.0	2.9	5.5	4.5	4.0	7	4	10	21	**14.16**
DAWP-16	4.0	2.9	5.5	3.8	3.3	7	4	10	21	**14.16**
DAWP-17	6.0	3.5	5.5	4.5	4.0	7	4	10	21	**14.16**
DAWP-18	6.0	3.5	5.5	3.8	3.3	7	4	10	21	**14.16**
DAWP-19	10	3.8	7.4	4.5	4.0	9	4	10	23	**15.45**
DAWP-20	10	3.8	7.4	3.8	3.3	9	4	10	23	**15.45**
DAWP-21	10	4.4	7.4	4.5	4.0	9	4	10	23	**15.45**
DAWP-22	10	4.4	7.4	3.8	3.3	9	4	10	23	**15.45**
DAWP-23	16	5.4	8.3	6.0	5.5	13	5	15	33	**20.60**
DAWP-24	16	5.4	8.3	6.0	5.5	13	5	20	38	**20.60**
DAWP-2	16	5.4	8.3	3.8	3.3	13	5	13	31	**20.60**
DAWP-25	25	7.0	10.0	6.0	5.5	16	5	15	36	**28.73**
DAWP-3	25	7.0	10.0	7.5	6.5	16	5	20	41	**28.73**
DAWP-4	35	8.0	10.8	7.5	6.5	18	5	20	43	**31.92**
DAWP-26	50	9.3	13.0	7.5	6.5	22	5	20	47	**58.52**
DAWP-5	50	10.4	14.0	14.0	13.0	22	7	24	53	**58.52**
DAWP-27	70	11.6	16.0	7.5	6.5	26	5	20	51	**78.74**
DAWP-6	70	11.6	16.0	11.5	10.5	26	5	25	56	**78.74**
DAWP-28	70	11.6	16.0	11.5	10.5	26	5	32	63	**103.21**
DAWP-29	95	12.9	17.1	11.5	10.5	28	6	25	59	**106.40**
DAWP-8	95	12.9	17.1	15.6	14.0	28	6	27	61	**151.09**
DAWP-31	95	12.9	17.1	7.5	6.5	28	6	22	56	**106.40**
DAWP-32	95	12.9	17.1	12.8	11.8	28	6	32	66	**151.09**
DAWP-33	120	14.8	19.6	11.5	10.5	32	6	25	63	**128.74**
DAWP-34	120	14.8	19.6	7.5	6.5	32	6	22	60	**128.74**
DAWP-35	120	14.8	19.6	11.5	10.5	32	6	32	70	**151.09**
DAWP-36	120	14.8	19.6	15.6	14.0	32	6	32	70	**200.03**
DAWP-10	150	16.1	21.2	15.6	14.0	34	6	32	72	**N/A**
DAWP-37	150	16.1	21.2	11.5	10.5	34	6	32	72	**187.26**
DAWP-30	185	18.0	23.7	15.6	14.0	36	6	32	74	**305.37**
DAWP-38	185	18.0	23.7	11.5	10.5	36	6	32	74	**247.91**
DAWP-39	225	20.6	27.0	15.6	14.0	40	8	32	80	**351.12**
DAWP-46	225	20.6	27.0	21.0	18.0	40	8	42	90	**530.94**
DAWP-42	225	20.6	27.0	16.0	15.0	40	8	42	90	**463.90**
DAWP-44	240	22.0	28.0	16.0	15.0	44	8	42	94	**483.06**
DAWP-43	240	22.0	28.0	15.6	14.0	44	8	32	84	**425.60**
DAWP-45	300	24.0	31.0	16.0	15.0	47	8	42	97	**528.81**
DAWP-47	300	24.0	31.0	15.6	14.0	47	8	32	87	**483.06**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow


BI - METALLIC TUBE TERMINALS



Technical Data :

Material : EC Grade Aluminium : IS : 5082
Type Tested : BS EN/IEC - 61238
Conductivity : 61% IACS
Operating Temp : -20°C to 140°C
Finish : Electro Tinned
Aluminium alloy & temper 19501 (ELE) As Per : IS - 5082 : 1998

DEW Compression type Bi-Mettalic tubular terminal ends are basically made out of electrolytic grade Aluminium to IS -5082. These Aluminium terminals are first plated with copper and then electro-tinned.



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	F	B	K	G+H	J	Dew price (₹)
DBL-1	10	M6	4.4	7.4	10	2.8	9	4	17	30	**5.66**
DBL-2	10	M8	4.4	7.4	15	1.8	9	4	17	30	**5.66**
DBL-3	16	M6	5.4	8.3	11	2.9	13	4	20	37	**7.72**
DBL-4	16	M8	5.4	8.3	11	2.9	13	4	20	37	**7.72**
DBL-5	25	M8	7.0	10.0	14	3.0	16	7	21	44	**10.30**
DBL-6	25	M10	7.0	10.0	20	1.7	16	7	21	44	**10.30**
DBL-7	35	M8	8.0	10.8	15	2.8	18	7	22	47	**12.87**
DBL-8	35	M10	8.0	10.8	20	2.1	18	7	22	47	**12.87**
DBL-9	50	M8	9.3	13.0	18	3.7	22	8	24	54	**21.89**
DBL-10	50	M10	9.3	13.0	23	2.8	22	8	24	54	**21.89**
DBL-11	70	M10	11.6	16.0	22	4.4	26	8	26	60	**32.98**
DBL-12	70	M12	11.6	16.0	22	4.4	26	8	26	60	**32.98**
DBL-13	95	M10	12.9	17.1	25	4.2	28	8	28	64	**36.18**
DBL-14	95	M12	12.9	17.1	25	4.2	28	8	28	64	**36.18**
DBL-15	120	M10	14.8	19.6	28	4.8	32	11	30	73	**48.94**
DBL-16	120	M12	14.8	19.6	28	4.8	32	11	30	73	**48.94**
DBL-17	150	M12	16.1	21.2	31	5.1	34	11	34	79	**65.97**
DBL-18	150	M16	16.1	21.2	31	5.1	34	11	34	79	**65.97**
DBL-19	185	M12	18.0	23.7	34	5.7	36	12	36	84	**85.12**
DBL-20	185	M16	18.0	23.7	34	5.7	36	12	36	84	**85.12**
DBL-21	225	M12	20.6	27.0	39	6.4	40	14	40	94	**121.30**
DBL-22	240	M12	22.0	28.0	40	6.0	44	14	44	102	**140.45**
DBL-23	240	M16	22.0	28.0	40	6.0	44	14	44	102	**140.45**
DBL-24	300	M16	24.0	31.0	45.7	7.0	47	14	54	115	**231.95**
DBL-25	300	M20	24.0	31.0	45.7	7.0	47	14	54	115	**231.95**
DBL-26	400	M20	28.0	36.0	51	8.0	56	13	61	130	**286.22**
DBL-27	500	M20	30.0	41.0	58	11.0	60	15	65	140	**451.14**
DBL-28	630	M20	35.0	46.0	66	11.0	69	16	69	154	**582.01**
DBL-29	800	-	39.0	51.0	73	12.0	77	25	78	180	**922.49**
DBL-30	1000	-	43.5	57.0	81	13.5	100	30	90	220	**1,345.96**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

COPPER TUBE IN-LINE CONNECTORS - INSULATED



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned
Insulation : PVC / Nylon




DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	ØA1	ØC1	J1	J	Dew price (₹)
DEH-463	1.5	1.6	3.2	3.3	4.9	25.0	15	**7.40**
DEH-464	2.5	2.4	4.0	4.1	5.5	25.0	15	**8.88**
DEH-465	4.6	3.5	5.5	5.6	7.2	27.0	15	**13.33**

COPPER END SEALING FERRULES



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned

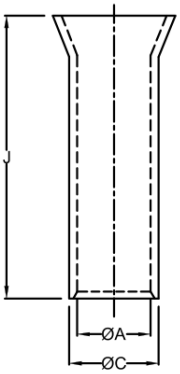

DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	J	Dew price (₹)
DEH-508	0.5	1.0-1.1	1.4-1.5	6	**1.48**
DEH-509	0.75	1.4-1.5	1.8-1.9	6	**1.48**
DEH-510	1.0	1.6-1.7	2.0-2.1	6	**1.48**
DEH-511	1.0	1.6-1.7	2.0-2.1	10	**1.48**
DEH-512	1.5	1.8-1.9	2.2-2.3	7	**1.48**
DEH-513	1.5	1.8-1.9	2.2-2.3	10	**1.48**
DEH-514	2.5	2.3-2.4	2.7-2.8	7	**1.48**
DEH-515	2.5	2.3-2.4	2.7-2.8	12	**1.48**
DEH-516	4.0	2.8-2.9	3.2-3.3	9	**1.48**
DEH-517	4.0	2.8-2.9	3.2-3.3	12	**2.96**
DEH-518	6.0	3.7-3.8	4.1-4.2	10	**2.96**
DEH-519	6.0	3.7-3.8	4.1-4.2	12	**2.96**
DEH-520	6.0	3.7-3.8	4.1-4.2	15	**4.45**
DEH-521	10	4.6-4.7	5.0-5.1	12	**4.45**
DEH-522	10	4.6-4.7	5.0-5.1	15	**5.00**
DEH-523	10	4.6-4.7	5.0-5.1	18	**7.40**
DEH-524	16	5.9-6.0	6.3-6.4	12	**4.45**
DEH-525	16	5.9-6.0	6.3-6.4	15	**5.83**
DEH-526	16	5.9-6.0	6.3-6.4	18	**7.40**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT


Dewconect®
Together We Grow

COPPER FORK TERMINAL - NON INSULATED



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned




DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	G	J	Dew price (₹)
DRS-7249SP	1.0	M3	1.2	2.8	6.6	5.0	3.4	14.5	**3.54**
DRS-7249	1.5	M3.5	1.6	3.2	6.8	5.0	3.4	14.5	**3.54**
DRS-7251	2.5	M3.5	2.3	3.9	6.5	5.0	3.2	15.0	**3.82**
DRS-7280	2.5	M5	2.6	4.6	10.6	6.2	6.2	18.6	**10.18**
DRS-7252	4-6	M3	3.5	5.5	6.0	6.0	3.5	15.0	**6.22**
DRS-7253	4-6	M3.5	3.5	5.5	6.0	6.0	4.0	15.0	**6.22**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

COPPER FORK TERMINAL-INSULATED/PRE-INSULATED





INSULATED



PRE-INSULATED



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned
Insulation : PVC / Nylon

Funnel Entry is provided for ease of wire insertion,
Terminals accommodates fine stranded wire.

Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	G	J	C1	J1	DEW CAT NO. (INSULATED)	Dew price (₹)	DEW CAT NO. (PRE-INSULATED)	Dew price (₹)
1.0	M3	1.2	2.8	6.6	5.0	3.4	14.5	4.8	10	**DRSI-7926SP**	4.25	-	-
1.5	M3.5	1.6	3.2	6.8	5.0	3.4	14.5	4.8	10	**DRSI-7926**	4.25	**DPSD-7935**	5.80
2.5	M3.5	2.3	3.9	6.5	5.0	3.2	15.0	5.5	10	**DRSI-7928**	4.96	**DPSD-7937**	6.22
2.5	M5	2.6	4.6	10.6	6.2	6.2	18.6	5.5	10	**DRSI-7929**	11.60	**DPSD-7938**	14.85
4-6	M3	3.5	5.5	6.0	6.0	3.5	15.0	7.1	14	**DRSI-7930**	8.34	**DPSD-7939**	10.33
4-6	M3.5	3.5	5.5	6.0	6.0	4.0	15.0	7.1	14	**DRSI-7931**	8.34	**DPSD-7940**	10.33

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT


Dewconect®
Together We Grow

COPPER PIN TERMINAL - NON INSULATED



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned
Insulation : PVC / Nylon

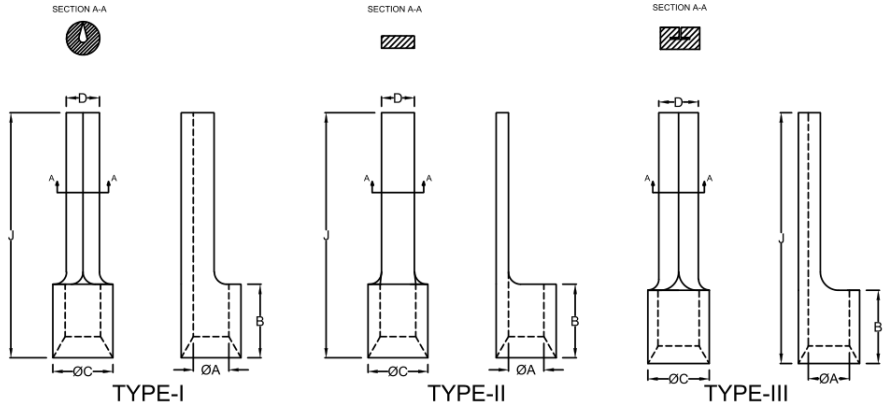

DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	D	B	J	TYPE	Dew price (₹)
DCP-44	1.0	1.2	2.8	1.4	5	17	I	**3.97**
DCP-9	1.5	1.6	3.2	1.9	5	17	I	**3.97**
DCP-35	1.5	1.6	3.2	3.1	5	17	II	**4.40**
DCP-1	2.5	2.3	3.9	1.9	5	17	I	**3.97**
DCP-2	2.5	2.3	3.9	3.1	5	17	II	**3.97**
DCP-3	4.0	2.9	4.9	2.7	6	20	I	**7.50**
DCP-5	6.0	3.6	5.6	2.7	6	20	I	**7.50**
DCP-7	10	4.5	6.7	4.3	8	22	III	**11.73**
DCP-8	16	5.8	8.2	5.5	10	26	III	**23.18**
DCP-86	25	7.5	11.1	7.0	11	32	III	**43.62**
DCP-87	35	9.0	12.6	7.5	12	38	III	**57.46**
DCP-88	50	10.5	14.1	9.0	16	42	III	**87.25**
DCP-89	70	12.0	16.0	9.0	18	47	III	**118.10**
DCP-90	95	13.5	18.1	9.0	20	52	III	**154.28**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

COPPER PIN TERMINAL - INSULATED/PRE - INSULATED



Technical Data :

Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned
Insulation : PVC / Nylon
Funnel Entry is provided for ease of wire insertion,
Terminals accommodates fine stranded wire.

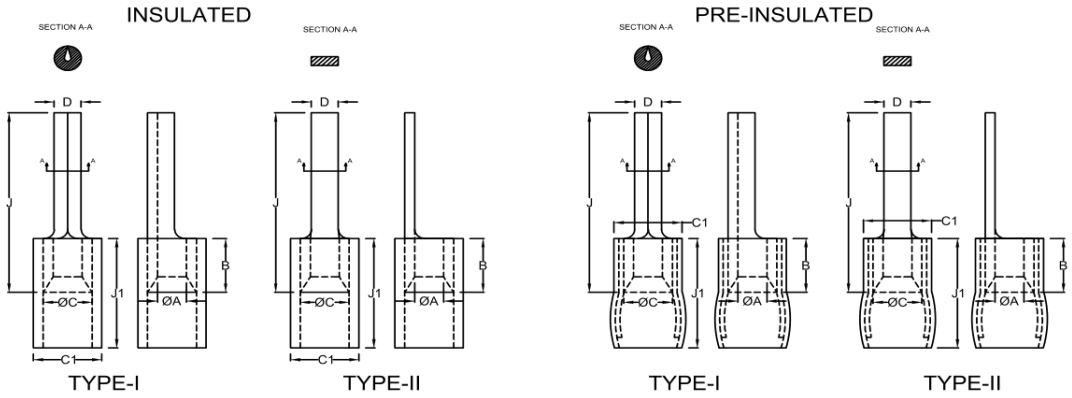

Size (Sq-mm)	ØA	ØC	D	B	J	C1	J1	DEW CAT NO. (INSULATED)	Dew price (₹)	DEW CAT NO. (PRE-INSULATED)	Dew price (₹)	TYPE
1.0	1.2	2.8	1.4	5.0	17.0	4.4	10	**DCPI-45**	4.39	-	-	I
1.5	1.6	3.2	1.9	5.0	17.0	4.8	10	**DCPI-17**	4.39	**DCPD-26**	5.95	I
1.5	1.6	3.2	3.1	5.0	17.0	4.8	10	**DCPI-40**	4.96	-	-	II
2.5	2.3	3.9	1.9	5.0	17.0	5.5	10	**DCPI-18**	4.53	**DCPD-27**	6.22	I
2.5	2.3	3.9	3.1	5.0	17.0	5.5	10	**DCPI-19**	4.53	**DCPD-28**	6.22	II
4.0	2.9	4.9	2.7	6.0	20.0	7.1	14	**DCPI-20**	8.91	**DCPD-29**	10.74	I

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

COPPER RING TERMINAL - NON INSULATED



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	G	J	Dew price (₹)
DRS-7318	1.0	M3.5	1.2	2.8	8.0	5	4.0	16.0	**3.69**
DRS-7001	1.5	M3	1.6	3.2	6.0	5	3.0	14.0	**3.97**
DRS-7002	1.5	M3.5	1.6	3.2	6.0	5	3.0	14.0	**3.97**
DRS-7003	1.5	M4	1.6	3.2	6.0	5	3.0	14.0	**3.97**
DRS-7048	1.5	M3.5	1.6	3.2	6.8	5	3.4	13.0	**3.97**
DRS-7049	1.5	M4	1.6	3.2	6.8	5	3.4	13.0	**3.97**
DRS-7004	1.5	M4	1.6	3.2	8.0	5	4.0	16.0	**4.10**
DRS-7005	1.5	M5	1.6	3.2	8.0	5	4.0	16.0	**4.10**
DRS-7154	1.5	M4	1.6	3.2	7.0	5	3.5	14.5	**4.25**
DRS-7006	1.5	M5	1.6	3.2	10.0	5	5.0	18.0	**4.96**
DRS-7007	1.5	M6	1.6	3.2	10.0	5	5.0	18.0	**4.96**
DRS-7106	1.5	M6	1.6	3.2	12.0	5	6.0	18.0	**5.09**
DRS-7107	2.5	M3	2.3	3.9	6.5	5	3.2	12.7	**4.53**
DRS-7008	2.5	M3.5	2.3	3.9	6.5	5	3.2	12.7	**4.96**
DRS-7108	2.5	M4	2.3	3.9	8.0	5	4.0	16.0	**4.96**
DRS-7009	2.5	M5	2.3	3.9	8.0	5	4.0	16.0	**4.25**
DRS-7010	2.5	M5	2.3	3.9	10.0	5	5.0	18.0	**4.25**
DRS-7011	2.5	M6	2.3	3.9	10.0	5	5.0	18.0	**4.25**
DRS-7109	2.5	M5	2.3	3.9	12.0	5	6.0	22.0	**4.25**
DRS-7012	2.5	M6	2.3	3.9	12.0	5	6.0	22.0	**5.95**
DRS-7110	2.5	M6	2.3	3.9	12.0	5	6.0	22.0	**5.95**
DRS-7013	2.5	M8	2.3	3.9	12.0	5	6.0	22.0	**6.93**
DRS-7014	2.5	M8	2.3	3.9	16.0	5	8.0	25.0	**8.34**
DRS-7151	2.5	M10	2.3	3.9	18.0	5	9.0	29.0	**9.77**
DRS-7155	4-6	M4	3.5	5.5	8.0	6	4.0	17.0	**7.63**
DRS-7050	4-6	M5	3.5	5.5	8.0	6	4.0	17.0	**7.63**
DRS-7016	4-6	M5	3.5	5.5	10.0	6	5.0	19.0	**9.05**
DRS-7017	4-6	M6	3.5	5.5	12.0	6	6.0	20.0	**7.78**
DRS-7018	4-6	M8	3.5	5.5	12.0	6	6.0	20.0	**9.05**
DRS-7019	4-6	M6	3.5	5.5	12.0	6	6.0	22.0	**10.33**
DRS-7115	4-6	M6	3.5	5.5	14.0	6	7.0	25.5	**11.31**
DRS-7020	4-6	M8	3.5	5.5	14.0	6	7.0	25.5	**12.01**
DRS-7116	4-6	M8	3.5	5.5	16.0	6	8.0	30.0	**14.85**
DRS-7023	4-6	M10	3.5	5.5	18.0	6	9.0	30.0	**13.28**
DRS-7024	4-6	M12	3.5	5.5	18.0	6	9.0	30.0	**13.28**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

COPPER RING TERMINAL - NON INSULATED



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned



DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	G	J	Dew price (₹)
DRS-7025	10.0	M5	4.3	6.3	10.0	8	5.0	22.0	**11.17**
DRS-7026	10.0	M5	4.3	6.3	10.0	8	5.0	20.0	**10.05**
DRS-7120	10.0	M6	4.3	6.3	12.0	8	6.0	23.0	**10.89**
DRS-7121	10.0	M8	4.3	6.3	16.0	8	8.0	27.0	**13.84**
DRS-7123	10.0	M10	4.3	6.3	22.0	8	11.0	34.0	**20.08**
DRS-7028	10.0	M12	4.3	6.3	22.0	8	11.0	34.0	**19.08**
DRS-7124	16.0	M5	5.6	8.0	10.0	10	5.0	24.0	**17.25**
DRS-7029	16.0	M6	5.6	8.0	12.0	10	6.0	26.0	**18.65**
DRS-7030	16.0	M8	5.6	8.0	16.0	10	8.0	30.0	**23.18**
DRS-7128	16.0	M10	5.6	8.0	22.0	10	11.0	35.0	**29.79**
DRS-7033	16.0	M12	5.6	8.0	22.0	10	11.0	35.0	**27.66**
DRS-7156	25.0	M6	7.5	11.1	12.0	11	6.0	31.0	**41.50**
DRS-7034	25.0	M8	7.5	11.1	16.0	11	8.0	30.0	**43.62**
DRS-7132	25.0	M10	7.5	11.1	22.0	11	11.0	42.0	**60.65**
DRS-7037	25.0	M12	7.5	11.1	22.0	11	11.0	42.0	**60.65**
DRS-7133	35.0	M6	9.0	12.6	16.0	12	8.0	31.0	**50.01**
DRS-7038	35.0	M8	9.0	12.6	16.0	12	8.0	31.0	**54.26**
DRS-7135	35.0	M10	9.0	12.6	22.0	12	11.0	42.0	**68.10**
DRS-7040	35.0	M12	9.0	12.6	22.0	12	11.0	42.0	**63.84**
DRS-7136	50.0	M8	10.5	14.1	18.0	16	9.0	43.0	**76.61**
DRS-7137	50.0	M10	10.5	14.1	22.0	16	11.0	43.0	**82.99**
DRS-7042	50.0	M12	10.5	14.1	24.0	16	12.0	48.0	**89.38**
DRS-7139	50.0	M16	10.5	14.1	32.0	16	16.0	54.0	**111.72**
DRS-7140	70.0	M10	12.0	16.0	22.0	18	11.0	47.0	**112.78**
DRS-7141	70.0	M12	12.0	16.0	24.0	18	12.0	48.0	**114.91**
DRS-7142	70.0	M16	12.0	16.0	28.0	18	14.0	54.0	**134.06**
DRS-7144	95.0	M10	13.5	18.1	24.0	20	12.0	50.0	**162.79**
DRS-7044	95.0	M12	13.5	18.1	24.0	20	12.0	50.0	**156.41**
DRS-7145	95.0	M16	13.5	18.1	28.0	20	14.0	58.0	**177.69**
DRS-7146	120.0	M12	15.0	20.2	26.0	22	13.0	52.0	**202.16**
DRS-7147	120.0	M16	15.0	20.2	32.0	22	16.0	64.0	**251.10**
DRS-7148	120.0	M20	15.0	20.2	40.0	22	20.0	72.0	**288.34**
DRS-7149	150.0	M12	16.5	23.7	34.0	24	17.0	66.0	**429.86**
DRS-7045	150.0	M16	16.5	23.7	34.0	24	17.0	66.0	**423.47**
DRS-7046	150.0	M20	16.5	23.7	40.0	24	20.0	74.0	**472.42**


Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

COPPER RING TERMINAL - INSULATED/PRE - INSULATED



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned
Insulation : PVC / Nylon
Funnel Entry is provided for ease of wire insertion,
Terminals accommodates fine stranded wire.

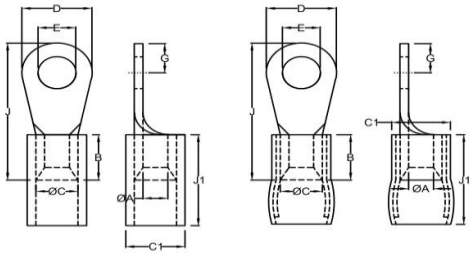

INSULATED PRE-INSULATED

Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	G	J	C1	J1	DEW CAT NO. (INSULATED)	Dew price (₹)	DEW CAT NO. (PRE-INSULATED)	Dew price (₹)
1.0	M3.5	1.2	2.8	8.0	5	4.0	16.0	-	-	**DRSI-7502**	4.25	-	-
1.5	M3	1.6	3.2	6.0	5	3.0	14.0	4.8	10	**DRSI-7054**	5.95	**DPSD-7437**	6.22
1.5	M3.5	1.6	3.2	6.0	5	3.0	14.0	4.8	10	**DRSI-7055**	5.95	**DPSD-7438**	6.22
1.5	M4	1.6	3.2	6.0	5	3.0	14.0	4.8	10	**DRSI-7056**	5.95	**DPSD-7439**	6.22
1.5	M3.5	1.6	3.2	6.8	5	3.4	13.0	4.8	10	**DRSI-7058**	6.08	**DPSD-7441**	6.22
1.5	M4	1.6	3.2	6.8	5	3.4	13.0	4.8	10	**DRSI-7059**	6.08	**DPSD-7442**	6.22
1.5	M4	1.6	3.2	8.0	5	4.0	16.0	4.8	10	**DRSI-7061**	4.53	**DPSD-7444**	6.08
1.5	M5	1.6	3.2	8.0	5	4.0	16.0	4.8	10	**DRSI-7062**	4.53	**DPSD-7445**	6.08
1.5	M4	1.6	3.2	7.0	5	3.5	14.5	4.8	10	**DRSI-7063**	5.95	**DPSD-7446**	7.07
1.5	M5	1.6	3.2	10.0	5	5.0	18.0	4.8	10	**DRSI-7065**	7.21	**DPSD-7448**	7.50
1.5	M6	1.6	3.2	10.0	5	5.0	18.0	4.8	10	**DRSI-7066**	6.93	**DPSD-7449**	7.50
1.5	M6	1.6	3.2	12.0	5	6.0	18.0	4.8	10	**DRSI-7067**	7.21	**DPSD-7450**	7.78
2.5	M3	2.3	3.9	6.5	5	3.2	12.7	5.5	10	**DRSI-7068**	6.08	**DPSD-7451**	7.50
2.5	M3.5	2.3	3.9	6.5	5	3.2	12.7	5.5	10	**DRSI-7069**	6.08	**DPSD-7452**	7.50
2.5	M3.5	2.3	3.9	8.0	5	4.0	16.0	5.5	10	**DRSI-7070**	6.93	**DPSD-7453**	7.63
2.5	M4	2.3	3.9	8.0	5	4.0	16.0	5.5	10	**DRSI-7071**	5.95	**DPSD-7454**	6.51
2.5	M5	2.3	3.9	8.0	5	4.0	16.0	5.5	10	**DRSI-7072**	5.95	**DPSD-7455**	6.51
2.5	M5	2.3	3.9	10.0	5	5.0	18.0	5.5	10	**DRSI-7073**	6.22	**DPSD-7456**	6.51
2.5	M6	2.3	3.9	10.0	5	5.0	18.0	5.5	10	**DRSI-7074**	6.22	**DPSD-7457**	6.51
2.5	M6	2.3	3.9	12.0	5	6.0	22.0	5.5	10	**DRSI-7075**	8.49	**DPSD-7458**	9.05
2.5	M6	2.3	3.9	12.0	5	6.0	22.0	5.5	10	**DRSI-7076**	7.50	**DPSD-7459**	8.34
2.5	M8	2.3	3.9	12.0	5	6.0	22.0	5.5	10	**DRSI-7077**	7.63	**DPSD-7460**	9.05
2.5	M8	2.3	3.9	16.0	5	8.0	25.0	5.5	10	**DRSI-7079**	9.05	**DPSD-7462**	10.74
2.5	M10	2.3	3.9	18.0	5	9.0	29.0	5.5	10	**DRSI-7081**	10.74	**DPSD-7464**	12.01
4-6	M4	3.5	5.5	8.0	6	4.0	17.0	7.1	14	**DRSI-7083**	9.05	**DPSD-7466**	11.31
4-6	M5	3.5	5.5	8.0	6	4.0	17.0	7.1	14	**DRSI-7084**	9.05	**DPSD-7467**	11.31
4-6	M5	3.5	5.5	10.0	6	5.0	19.0	7.1	14	**DRSI-7086**	10.74	**DPSD-7469**	12.86
4-6	M6	3.5	5.5	12.0	6	6.0	20.0	7.1	14	**DRSI-7089**	10.33	**DPSD-7472**	11.73
4-6	M8	3.5	5.5	12.0	6	6.0	20.0	7.1	14	**DRSI-7090**	10.74	**DPSD-7473**	12.72
4-6	M6	3.5	5.5	12.0	6	6.0	22.0	7.1	14	**DRSI-7092**	12.01	**DPSD-7475**	13.99
4-6	M6	3.5	5.5	14.0	6	7.0	25.5	7.1	14	**DRSI-7093**	13.00	**DPSD-7476**	15.69
4-6	M8	3.5	5.5	14.0	6	7.0	25.5	7.1	14	**DRSI-7094**	13.00	**DPSD-7477**	15.69
4-6	M8	3.5	5.5	16.0	6	8.0	30.0	7.1	14	**DRSI-7096**	15.69	**DPSD-7479**	17.25
4-6	M10	3.5	5.5	18.0	6	9.0	30.0	7.1	14	**DRSI-7099**	14.85	**DPSD-7482**	18.65
4-6	M12	3.5	5.5	18.0	6	9.0	30.0	7.1	14	**DRSI-7100**	14.85	**DPSD-7483**	17.25

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

COPPER TUBE TERMINALS - EXTENDED BLANK PALM



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600
Type Tested : BS EN/IEC - 61238
Conductivity : 99.7% IACS
Operating Temp : 55°C to 140°C Due to Oxygen Free Copper
Condition : Fully Annealed
Finish : Electro Tinned
Long palm design for totally airtight cable application



DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	ØD	D1	B	K	G+H	J	Dew price (₹)
DCUS-466	50	9.5	12.4	18.0	2.9	16	6	42	64	**187.26**
DCUS-467	70	11.2	14.7	21.0	3.5	18	7	50	75	**308.56**
DCUS-468	95	13.5	17.4	25.0	3.9	20	9	52	81	**440.50**
DCUS-469	120	15.0	19.4	28.0	4.4	22	10	56	88	**528.81**
DCUS-470	150	16.5	21.2	30.0	4.7	26	11	64	101	**693.73**
DCUS-471	185	18.5	23.5	34.0	5.0	32	12	68	112	**1,027.82**
DCUS-472	240	21.0	26.5	38.0	5.5	38	14	80	132	**1,326.81**
DCUS-473	300	23.5	30.0	43.0	6.5	42	15	88	145	**2,191.84**
DCUS-474	400	28.5	36.5	53.0	8.0	44	18	104	166	**3,795.29**
DCUS-475	500	30.0	39.0	56.0	9.0	48	20	112	180	**4,551.79**
DCUS-476	630	35.0	45.0	65.0	10.0	56	22	132	210	**7,010.70**

BI-METALLIC FRICTION WELDED TERMNIALS



Technical Data :
Material : EC Grade Copper : IS 191/BS EN 13600. Electrolytic Aluminium IS - 5082
Type Tested : BS EN/IEC - 61238
Finish : Natural (Tin Coated also available on request)
Condition : Fully Annealed
NOTE : E Bolt for 500 and 630 SQ-MM will be provided on request.

DEW CAT. NO.	Size (Sq-mm)	E bolt hole	ØA	ØC	D	B	G	J	Dew price (₹)
DCAF-25-10	25	M10	7.5	12.0	19	4.0	30	70	**338.35**
DCAF-35-10	35	M10	8.5	14.0	19	4.0	30	75	**342.61**
DCAF-50-13	50	M13	10.2	16.0	24	5.0	35	85	**467.10**
DCAF-70-13	70	M13	11.5	20.0	24	5.0	40	90	**547.96**
DCAF-95-13	95	M13	13.5	22.0	24	5.0	45	95	**556.47**
DCAF-120-13	120	M13	15.5	22.0	30	6.0	50	105	**638.40**
DCAF-150-13	150	M13	16.5	24.0	30	6.0	55	110	**704.37**
DCAF-185-13	185	M13	18.0	30.0	35	7.0	60	130	**1,181.04**
DCAF-240-13	240	M13	22.0	32.0	35	7.0	65	135	**1,208.70**
DCAF-300-17	300	M17	23.5	35.0	36	7.5	70	140	**1,568.34**
DCAF-400-17	400	M17	26.5	35.0	36	7.5	75	145	**1,953.50**
DCAF-500	500	-	30.0	47.0	55	10.5	95	200	**4,045.33**
DCAF-630	630	-	34.0	54.0	55	10.5	95	200	**4,710.33**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Dewconect®
Together We Grow

BI-METALLIC FRICTION WELDED CONNECTORS



Technical Data :
Material : Material : EC Grade Copper : IS 191/BS EN 13600,
EC Grade Aluminium : IS : 5082
Finish : Natural (Tin coated also available on request)



DEW CAT. NO.	Aluminium	Copper	ØA	ØC	B	ØA-1	ØC-1	B-1	J	Dew price (₹)
DCACF-16-16	16	16	5.5	16.0	43.0	5.6	12.2	29.0	88	**348.99**
DCACF-25-16	25	16	6.5	16.0	43.0	5.6	12.2	29.0	88	**348.99**
DCACF-25-25	25	25	6.5	16.0	43.0	7.0	12.2	29.0	88	**348.99**
DCACF-35-16	35	16	8.0	16.0	43.0	5.6	12.2	29.0	88	**348.99**
DCACF-35-25	35	25	8.0	16.0	43.0	7.0	12.2	29.0	88	**342.61**
DCACF-35-35	35	35	8.0	16.0	43.0	8.0	12.2	29.0	88	**338.35**
DCACF-50-25	50	25	9.0	20.0	43.0	7.0	12.2	29.0	88	**428.79**
DCACF-50-35	50	35	9.0	20.0	43.0	8.0	12.2	29.0	88	**428.79**
DCACF-50-50	50	50	9.0	20.0	43.0	9.5	12.2	29.0	88	**417.09**
DCACF-70-35	70	35	11.0	20.0	43.0	8.0	12.2	29.0	88	**424.54**
DCACF-70-50	70	50	11.0	20.0	43.0	9.5	12.2	29.0	88	**416.02**
DCACF-70-70	70	70	11.0	20.0	43.0	11.0	12.2	33.0	90	**399.00**
DCACF-95-50	95	50	12.5	20.0	43.0	9.5	18.0	29.0	88	**530.94**
DCACF-95-70	95	70	12.5	20.0	43.0	11.0	18.0	33.0	90	**516.04**
DCACF-95-95	95	95	12.5	20.0	43.0	13.0	18.0	33.0	90	**512.85**
DCACF-120-70	120	70	13.7	25.0	59.0	11.0	21.0	33.0	107	**892.70**
DCACF-120-95	120	95	13.7	25.0	59.0	13.0	21.0	33.0	107	**877.80**
DCACF-120-120	120	120	13.7	25.0	59.0	14.2	21.0	33.0	107	**856.52**
DCACF-150-95	150	95	15.5	25.0	59.0	13.0	21.0	33.0	107	**871.42**
DCACF-150-120	150	120	15.5	25.0	59.0	14.2	21.0	33.0	107	**852.26**
DCACF-150-150	150	150	15.5	25.0	59.0	16.0	21.0	33.0	107	**819.28**
DCACF-185-120	185	120	17.0	32.0	59.0	14.2	21.0	33.0	107	**911.85**
DCACF-185-150	185	150	17.0	32.0	59.0	16.0	21.0	33.0	107	**884.18**
DCACF-185-185	185	185	17.0	32.0	59.0	18.0	26.2	43.0	120	**1,155.50**
DCACF-240-150	240	150	19.5	32.0	59.0	16.0	21.0	33.0	107	**990.58**
DCACF-240-185	240	185	19.5	32.0	59.0	18.0	26.2	43.0	120	**1,127.84**
DCACF-240-240	240	240	19.5	32.0	59.0	20.0	26.2	43.0	120	**1,077.83**


Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

SINGLE COMPRESSION BRASS CABLE GLANDS

Technical Data :
Material : Brass As per IS-12943
Tolerances : 2mm
Finish : Nickel Coated (Tin/Cadmium Coated also available on request)





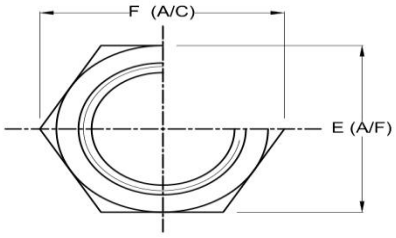

DEW CAT. NO.	Suitable Overall OD	ØA	ØB	ØC	D	E (A/F)	E (A/C)	Dew price (₹)
DSC-3/8"	06.0-12.5	11.5	12.5	15.5	7.5	18.0	20.5	**133.00**
DSC-1/2"	12.6-14.0	12.0	15.0	15.5	8.5	22.0	25.0	**133.00**
DSC-5/8"	14.1-15.5	14.5	16.5	18.5	8.0	21.0	24.0	**133.00**
DSC-3/4"	15.6-16.5	14.5	17.5	19.0	8.5	23.0	26.0	**155.80**
DSC-7/8"	16.6-19.0	14.5	20.0	18.5	8.5	25.0	29.0	**183.35**
DSC-1"	19.1-22.0	20.5	23.0	25.0	9.0	29.0	33.0	**278.35**
DSC-1.1/8"	22.1-27.0	24.0	28.0	28.5	10.5	35.0	40.0	**329.65**
DSC-1.1/4"	27.1-31.0	27.0	32.0	31.5	11.0	40.0	46.0	**464.55**
DSC-1.3/8"	31.1-34.5	29.5	35.5	34.5	11.0	44.0	50.0	**578.55**
DSC-1.1/2"	34.6-38.5	33.0	39.5	38.0	11.5	47.0	54.0	**682.10**
DSC-1.3/4"	38.6-43.5	40.0	44.5	44.0	11.5	54.0	62.0	**827.45**
DSC-2"	43.6-50.5	45.0	51.5	50.0	13.0	60.0	69.0	**1,010.80**
DSC-2.1/4"	50.6-57.0	51.5	58.0	56.5	13.0	68.0	78.0	**1,299.60**
DSC-2.1/2"	57.1-61.0	57.5	62.5	63.0	14.0	72.0	82.0	**1,501.95**
DSC-2.3/4"	61.6-68.0	63.5	69.0	69.0	15.0	80.0	90.0	**2,104.25**
DSC-3"	68.1-74.0	68.0	75.0	75.0	16.0	87.0	99.0	**2,592.55**
DSC-3.1/4"	74.1-80.5	75.0	81.5	82.0	16.0	92.0	105.0	**2,755.00**
DSC-3.1/2"	80.6-87.0	81.5	86.5	88.0	16.0	102.0	115.0	**3,467.50**
DSC-4"	87.1-100.0	92.0	101.0	100.0	17.0	110.0	126.0	**4,115.40**
DSC-4.1/2"	100.1-108.0	107.0	109.0	105.0	20.0	129.5	148.0	**6,862.80**


Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

SINGLE COMPRESSION BRASS CABLE GLANDS-HEAVY DUTY (SIBG)

Technical Data :
Material : Brass As per IS-12943
Tolerances : 2mm
Finish : Nickel Coated (Tin/Cadmium Coated also available on request)



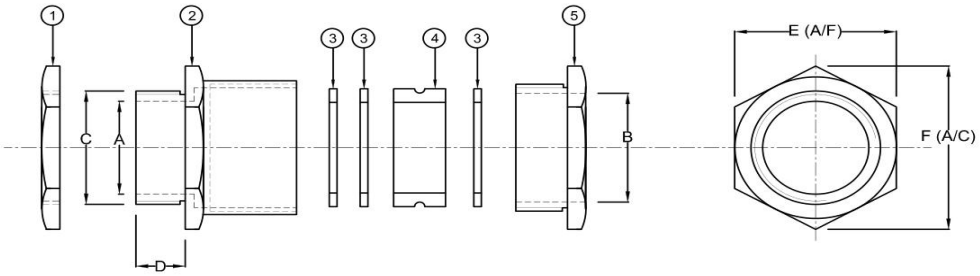

DEW CAT. NO.	Suitable Overall OD	ØA	ØB	ØC	D	E (A/F)	E (A/C)	Dew price (₹)
1216	09.0-12.0	12.0	16.0	16.0	9.0	22.0	25.5	**N/A**
1616	12.0-15.5	12.0	18.5	16.0	9.0	25.5	29.0	**236.55**
1619	12.0-15.5	15.0	18.5	20.0	9.0	25.5	29.0	**251.75**
2119	18.0-20.0	15.0	24.0	20.0	9.5	30.0	34.5	**390.45**
2125	18.0-20.0	20.5	24.0	25.0	9.5	31.5	36.0	**356.25**
2925	21.0-25.0	20.5	28.5	25.0	10.0	35.5	40.0	**498.75**
2932	25.5-29.0	27.0	33.0	32.0	12.0	40.0	46.0	**548.15**
2938	29.0-33.0	34.0	37.0	40.0	12.0	46.0	53.0	**594.70**
3638	33.0-37.0	34.0	41.0	40.0	12.0	41.5	57.5	**817.95**
4251	38.0-42.0	44.0	47.0	50.0	13.0	58.0	67.0	**1,491.50**
5451	43.0-50.0	44.0	52.0	50.0	13.0	65.0	75.0	**1,699.55**
5463	48.0-54.0	55.0	61.5	63.0	14.0	73.0	84.0	**1,688.15**
6063	55.0-60.0	55.0	65.0	63.0	14.0	77.0	89.0	**2,592.55**
6675	61.0-66.0	68.0	71.0	75.0	15.0	85.0	98.0	**3,141.65**
7882	67.0-72.0	67.0	76.0	75.0	15.0	90.0	104.0	**4,325.35**
8490	73.0-78.0	73.0	82.0	82.0	17.0	97.0	112.0	**N/A**

Particulars / Material / Nos.

Sr. No.	Particulars	Material	Nos.
1	CHECK NUT	BRASS	1
2	GLAND BODY	BRASS	1
3	METAL WASHER	M.S.	3
4	SEALING RING	NATURAL	1
5	COMPRESSION RING	BRASS	1


Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

INSULATED END SEALING FERRULES



INSULATED



Technical Data :
Material : Material : EC Grade Copper : IS 191/BS EN 13600,
Finish : Finish : Electro Tinned

DEW CAT. NO.	Size (Sq-mm)	ØA	ØC	J	J-1	Dew price (₹)
DEHI-508	0.5	1.0	1.4	6.0	12.0	**1.48**
DEHI-509	0.75	1.4	1.8	6.0	12.0	**1.48**
DEHI-510	1.0	1.6	2.0	6.0	12.0	**2.96**
DEHI-511	1.0	1.6	2.0	10.0	16.0	**2.96**
DEHI-512	1.5	1.8	2.2	7.0	13.0	**1.48**
DEHI-513	1.5	1.8	2.2	10.0	16.0	**2.96**
DEHI-514	2.5	2.3	2.7	7.0	13.0	**2.96**
DEHI-515	2.5	2.3	2.7	12.0	18.0	**2.96**
DEHI-516	4.0	2.8	3.2	9.0	16.0	**1.48**
DEHI-517	4.0	2.8	3.2	12.0	20.0	**4.45**
DEHI-518	6.0	3.7	4.1	10.0	18.0	**2.96**
DEHI-519	6.0	3.7	4.1	12.0	20.0	**4.45**
DEHI-520	6.0	3.7	4.1	15.0	21.0	**4.45**
DEHI-521	10.0	4.6	5.0	12.0	22.0	**5.92**
DEHI-522	10.0	4.6	5.0	15.0	24.0	**5.00**
DEHI-523	10.0	4.6	5.0	18.0	28.0	**7.40**
DEHI-524	16.0	5.9	6.3	12.0	24.0	**4.45**
DEHI-525	16.0	5.9	6.3	15.0	25.0	**7.40**
DEHI-526	16.0	5.9	6.3	18.0	28.0	**7.40**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT


DOUBLE COMPRESSION WEATHER PROOF CABLE GLANDS-ARMOURED






Technical Data :

Material : Brass As per IS-12943
Type Tested : BS-6121-1-2005 OR LATEST.
Finish : Bright Nickel plated (Tin/Cadmium /Nickel crome coating also available on request)
Entry Thread : ET/BSC. (PG/MATRIC/NPT/BSP also available on request)
Seal Ring : Neoprene/Nitrile/Natural Rubber.
Ref. Standard : BS: 62444 : 2013, BS-6121-1-2005 OR LATEST.
Ingrees Protection : IP-67
Tolerances : 2mm

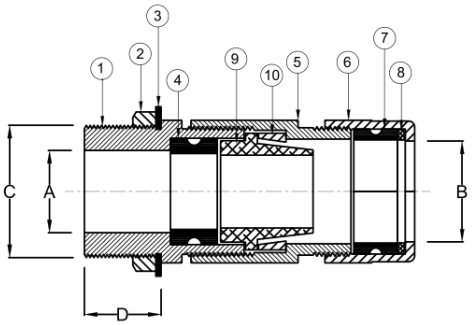



DEW CAT. NO.	Suitable Overall OD	ØA	ØB	ØC	D	E (A/F)	E1 (A/C)	Dew price (₹)
DDBW-01SS	06.0-12.0	12.5	13.0	3/4"	13	21.0	24.0	**453.15**
DDBW-01S	12.0-16.5	14.5	18.0	3/4"	15	25.0	29.0	**545.30**
DDBW-01	16.5-18.5	14.5	19.0	3/4"	15	27.5	31.5	**609.90**
DDBW-01A	16.5-18.5	14.5	19.0	1"	15	27.5	31.5	**697.30**
DDBW-02	18.5-20.0	18.0	21.0	1"	15	30.0	34.5	**780.90**
DDBW-02A	18.5-20.0	14.5	21.0	3/4"	15	30.0	34.5	**780.90**
DDBW-03	20.0-23.0	19.0	23.5	1"	15	31.5	36.0	**790.40**
DDBW-04	23.0-26.0	20.5	27.0	1"	15	36.0	41.5	**1,080.15**
DDBW-04A	23.0-26.0	22.0	27.0	1.1/4"	15	36.0	41.5	**1,159.95**
DDBW-05	26.0-30.0	25.5	31.0	1.1/4"	15	41.0	47.0	**1,352.80**
DDBW-05 A	26.0-30.0	27.0	31.0	1.1/2"	15	41.0	47.0	**1,618.80**
DDBW-06	30.0-33.0	31.0	34.5	1.1/2"	15	47.0	54.0	**1,943.70**
DDBW-06 A	30.0-33.0	27.0	34.5	1.1/4"	15	47.0	54.0	**2,011.15**
DDBW-07	33.0-37.0	32.0	38.0	1.1/2"	15	50.0	57.0	**2,271.45**
DDBW-08	37.0-41.0	38.5	42.5	2"	15	56.0	64.0	**2,914.60**
DDBW-09	41.0-46.0	40.0	47.0	2"	15	59.0	67.0	**3,214.80**
DDBW-010	46.0-52.0	44.0	53.0	2"	20	67.0	77.0	**3,528.30**
DDBW-010 A	46.0-52.0	48.0	53.0	2.1/2"	20	67.0	77.0	**4,308.25**
DDBW-011	52.0-61.0	51.0	57.0	2.1/2"	20	72.0	83.0	**5,251.60**
DDBW-011A	52.0-54.0	56.5	62.0	2.1/2"	20	80.0	92.0	**4,999.85**
DDBW-012	61.0-66.0	64.0	68.0	3"	20	85.0	98.0	**6,412.50**
DDBW-013A	66.0-72.0	67.0	73.0	3"	20	89.0	103.0	**8,033.20**
DDBW-013	72.0-78.0	74.0	80.0	3.1/4"	20	99.0	113.0	**9,066.80**
DDBW-014	78.0-84.0	78.0	85.0	3.1/2"	20	105.0	121.0	**10,880.35**
DDBW-015	84.0-94.0	90.5	97.0	4"	20	114.0	132.0	**14,570.15**
DDBW-016	94.0-104.0	101.0	106.0	4.1/2"	20	130.0	149.0	**18,776.75**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT


DOUBLE COMPRESSION FLAME PROOF CABLE GLANDS-ARMOURED






Technical Data :

Material : Brass As per IS-12943
Type Tested : IS/IEC 60079-0-2017, IS/IEC 60079-1-2014, IS/IEC 60079-31-2013
Finish : Bright Nickel plated (Tin/Cadmium /Nickel crome coating also available on request)
Entry Thread : ET/BSC. (PG/MATRIC/NPT/BSP also available on request)
Seal Ring : Neoprene/Nitrile/Natural Rubber.
Ref. Standard : BS: 62444 : 2013, BS-6121-1-2005 OR LATEST
Ingrees Protection : IP-67
Tolerances : 2mm
Type Of Protection : Ex db Gass Group IIC.

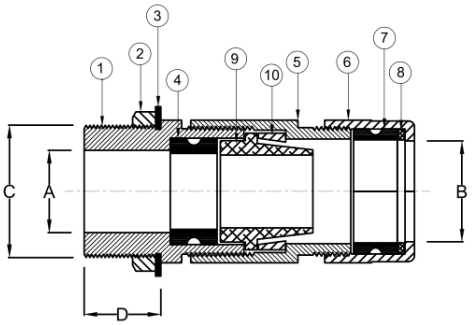




DEW CAT. NO.	Suitable Overall OD	ØA	ØB	ØC	D	E (A/F)	E1 (A/C)	Dew price (₹)
DDBF-01SS	06.0-12.0	12.5	13.0	3/4"	25	21.0	24.0	**584.25**
DDBF-01S	12.0-16.5	14.5	18.0	3/4"	25	25.0	29.0	**628.90**
DDBF-01	16.5-18.5	14.5	19.0	3/4"	25	27.5	31.5	**694.45**
DDBF-01A	16.5-18.5	14.5	19.0	1"	25	27.5	31.5	**823.65**
DDBF-02	18.5-20.0	18.0	21.0	1"	25	30.0	34.5	**912.00**
DDBF-02A	18.5-20.0	14.5	21.0	3/4"	25	30.0	34.5	**959.50**
DDBF-03	20.0-23.0	19.0	23.5	1"	25	31.5	36.0	**1,030.75**
DDBF-04	23.0-26.0	20.5	27.0	1"	25	36.0	41.5	**1,310.05**
DDBF-04A	23.0-26.0	22.0	27.0	1.1/4"	25	36.0	41.5	**1,463.00**
DDBF-05	26.0-30.0	25.5	31.0	1.1/4"	25	41.0	47.0	**1,521.90**
DDBF-05 A	26.0-30.0	27.0	31.0	1.1/2"	25	41.0	47.0	**1,847.75**
DDBF-06	30.0-33.0	31.0	34.5	1.1/2"	25	47.0	54.0	**2,279.05**
DDBF-06 A	30.0-33.0	27.0	34.5	1.1/4"	25	47.0	54.0	**2,382.60**
DDBF-07	33.0-37.0	32.0	38.0	1.1/2"	25	50.0	57.0	**2,563.10**
DDBF-08	37.0-41.0	38.5	42.5	2"	25	56.0	64.0	**3,176.80**
DDBF-09	41.0-46.0	40.0	47.0	2"	25	59.0	67.0	**3,505.50**
DDBF-010	46.0-52.0	44.0	53.0	2"	25	67.0	77.0	**4,132.50**
DDBF-010 A	46.0-52.0	48.0	53.0	2.1/2"	25	67.0	77.0	**4,694.90**
DDBF-011	52.0-61.0	51.0	57.0	2.1/2"	25	72.0	83.0	**5,770.30**
DDBF-011A	52.0-54.0	56.5	62.0	2.1/2"	25	80.0	92.0	**6,299.45**
DDBF-012	61.0-66.0	64.0	68.0	3"	25	85.0	98.0	**6,965.40**
DDBF-013A	66.0-72.0	67.0	73.0	3"	25	89.0	103.0	**9,778.35**
DDBF-013	72.0-78.0	74.0	80.0	3.1/4"	25	99.0	113.0	**10,978.20**
DDBF-014	78.0-84.0	78.0	85.0	3.1/2"	25	105.0	121.0	**11,655.55**
DDBF-015	84.0-94.0	90.5	97.0	4"	25	114.0	132.0	**15,860.25**
DDBF-016	94.0-104.0	101.0	106.0	4.1/2"	25	130.0	149.0	**20,397.45**


Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

DOUBLE COMPRESSION WEATHER PROOF CABLE GLANDS-UN-ARMOURED



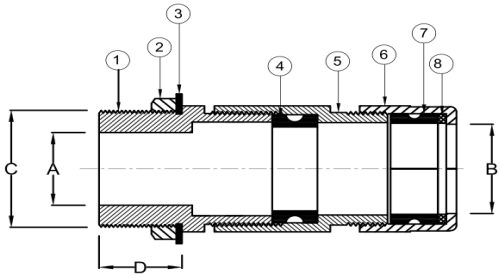



Technical Data :
Material : Brass As per IS-12943
Finish : Bright Nickel plated (Tin/Cadmium /Nickel crome coating also available on request)
Type Tested : BS-6121-1-2005 OR Latest.
Entry Thread : ET/BSC. (PG/MATRIC/NPT/BSP also available on request)
Seal Ring : Neoprene/Nitrile/Natural Rubber.
Ref. Standard : BS : 62444 : 2013, BS-6121-1-2005 OR LATEST.
Ingrees Protection : IP-67
Tolerances : 2mm

DEW CAT. NO.	Suitable Overall OD	ØA	ØB	ØC	D	E (A/F)	E1 (A/C)	Dew price (₹)
DDBW-01SS(UN)	0.6-12.5	13.0	13.0	3/4"	15	21.5	24.5	**480.70**
DDBW-01S(UN)	12.6-14.0	14.5	14.5	3/4"	15	25.0	28.7	**525.35**
DDBW-01A(UN)	14.1-17.0	18.0	18.0	1"	15	27.4	31.4	**667.85**
DDBW-02(UN)	17.1-19.0	20.0	20.0	1"	15	30.0	35.0	**812.25**
DDBW-03SP(UN)	19.1-22.0	23.0	23.0	28mm	15	31.0	36.0	**866.40**
DDBW-04A(UN)	22.1-25.0	26.0	26.0	1.1/4"	15	37.0	43.0	**1,229.30**
DDBW-05A(UN)	25.1-29.0	30.0	30.0	1.1/2"	15	41.0	47.0	**1,347.10**
DDBW-06SP(UN)	29.1-32.0	33.0	33.0	40mm	15	46.0	53.0	**1,884.80**
DDBW-07SP(UN)	32.1-35.0	36.0	36.0	42mm	15	50.0	57.0	**2,167.90**
DDBW-08(UN)	35.1-40.0	41.0	41.0	2"	15	56.0	64.0	**2,720.80**
DDBW-09(UN)	40.1-43.0	44.0	44.0	2"	15	58.0	66.0	**3,223.35**
DDBW-010A(UN)	43.1-51.0	52.0	52.0	2.1/2"	20	65.0	75.0	**3,971.00**
DDBW-011SP(UN)	51.1-59.0	60.0	60.0	70mm	20	79.0	90.0	**5,247.80**
DDBW-012(UN)	59.1-65.0	66.0	66.0	3"	20	84.5	96.0	**6,164.55**
DDBW-013(UN)	65.1-71.0	72.0	72.0	3.1/4"	20	89.0	102.0	**8,190.90**
DDBW-014(UN)	71.1-79.0	80.0	80.0	3.1/2"	20	104.0	121.0	**9,533.25**
DDBW-015(UN)	79.1-89.0	90.0	90.0	4"	20	115.0	135.0	**14,301.30**

SR. NO.	PARTICULARS	MATERIAL	NOS.	SR. NO.	PARTICULARS	MATERIAL	NOS.
1.	NIPPLE	BRASS	1	6.	COMPRESSION NUT	BRASS	1
2.	CHECK NUT	BRASS	1	7.	OUTER SEAL	NEOPRENE/NITRILE	1
3.	GASKET	NEOPRENE/NITRILE	1	8.	WASHER	NYLON	1
4.	INNER SEAL	NEOPRENE/NITRILE	1	9.	CONE	BRASS	1
5.	GLAND BODY	BRASS	1	10.	CONE RING	BRASS	1

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Shrouds Specification		
PRODUCT DESCRIPTION	**Deoconect Make Shrouds LSZH**	
Technical Details		
Sr. No.	**Technical Parameters**	**Specified**
1	**Physical Appearance**	Clean bright and Black Color
2	**Finish/Coating**	Natural Finish
3	**Dimensional Conformity**	As Per below Annexure 1
4	**Material**	High Grade Polyvinylchloride

Type Test Details

Parameters	Observed
Product Specification	IS:10810(Part 59)/IEC 60754-2 & IS 13360 (Part 6/Sec 9):2001
Halogen Acid Gas Test	Found within the limit as per IS 10810(Part 59)/IEC-60754-2 IEC-60754-2
Smoke Density Test	Found within the limit as per IS 13360(Part 6/Sec9): 2001

Annexure 1 of GTP- SS/M15-01





Catalogue No.	OD (mm) (+/-2mm)	Length (mm) (+/-5mm)
2023	23	80
2026	26	80
2030	30	90
2533	33	90
2535	35	100
4000	40	95
3246	46	110
3251	51	110
4053	53	110
5063	63	130
5068	68	130
6371	71	140
6388	88	150
7595	95	155


SHROUDS

DEW CAT. NO.	OD (mm) (+/-2mm)	Length (mm) (+/-5mm)	Dew price (₹)
2023	23	80	**21.95**
2026	26	80	**27.93**
2030	30	90	**35.91**
2533	33	90	**37.91**
2535	35	100	**46.88**
4000	40	95	**57.86**
3246	46	110	**59.85**
3251	51	110	**94.76**
4053	53	110	**103.74**
5063	63	130	**136.66**
5068	68	130	**150.62**
6371	71	140	**157.61**
6388	88	150	**240.40**
7595	95	155	**265.34**

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

Earth Tag Specification		
PRODUCT DESCRIPTION	**Deoconect Make Earth Tag**	
Technical Details		
Sr. No.	**Technical Parameters**	**Specified**
1	**Physical Appearance**	Clean bright & Free from burs and Sharp edges
2	**Finish/Coating**	Natural Finish
3	**Dimensional Conformity**	As Per below Annexure 1
4	**Chemical Analysis-BRASS** (As Per IS-12943)	55% Copper (minimum) 5% Impurities (maximum) Balance Zinc.

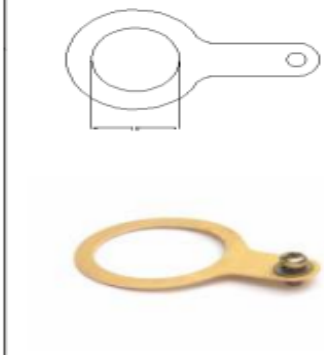

Catalogue No.	ID (mm) (+/- 2 mm)
DET-20	20
DET-25	25
DET-32	32
DET-40	40
DET-50	50
DET-63	63
DET-75	75
DET-90	90
DET-100	100
DET-110	110

DEW CAT. NO.	ID (mm) (+/- 2mm)	Dew price (₹)
DET-20	20	**50.35**
DET-25	25	**63.65**
DET-32	32	**75.05**
DET-40	40	**81.70**
DET-50	50	**94.05**
DET-63	63	**171.00**
DET-75	75	**216.60**
DET-90	90	**216.60**
DET-100	100	**437.95**
DET-110	110	**N/A**


Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.

WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT

DC TYPE MEDIUM DUTY BRASS CABLE GALND (For ARMOURED CABLE)

Technical Data :

Material : Brass As per : IS-319 (Alu./S.S./M.S./Also available).
Finish : Bright Nickel Plated (Also Tin/Chrome/Cadmium).
Entry Thread : BSC/ET
Tolerances : +/- 1mm

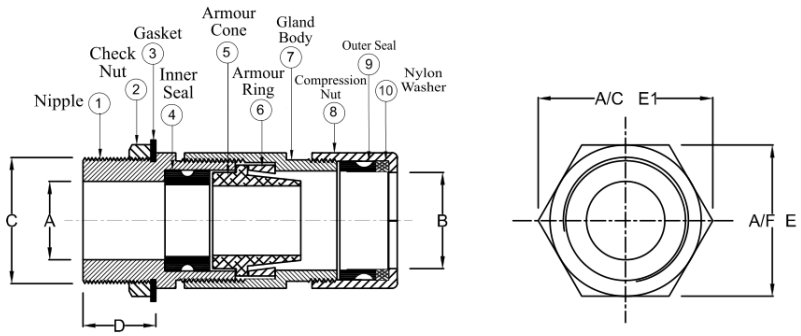


DEW CAT. NO.	Suitable Over All Diameter	D (mm)	A (mm)	B (mm)	C (inch)	E A/F (mm)	E1 A/C (mm)	Dew price (₹)
DC-3/8"	07.0-14.0	25	11.5	14.5	5/8"	20.5	23.5	**352.45**
DC-1/2"	14.1-15.5	25	12.0	16.0	5/8"	22.0	25.4	**440.80**
DC-5/8"	15.6-17.0	25	14.5	17.5	3/4"	24.0	27.7	**452.20**
DC-3/4"	17.1-18.5	25	14.5	19.0	3/4"	26.0	30.0	**521.55**
DC-7/8"	18.6-19.5	25	14.5	20.0	3/4"	26.5	30.6	**600.40**
DC-1"	19.6-22.5	25	20.5	23.0	1"	30.5	35.2	**700.15**
DC-1.1/8"	22.6-25.5	25	22.5	26.0	1.1/8"	34.0	39.2	**893.95**
DC-1.1/4"	25.6-31.5	25	25.5	32.0	1.1/4"	40.0	46.2	**1,178.95**
DC-1.3/8"	31.6-34.5	25	30.0	35.0	1.1/2"	42.0	48.5	**1,406.95**
DC-1.1/2"	34.6-36.5	25	32.5	37.0	1.1/2"	47.0	54.3	**1,655.85**
DC-1.3/4"	36.6-44.5	25	43.0	45.0	2"	56.0	64.5	**2,277.15**
DC-2"	44.6-49.5	25	43.0	50.0	2"	59.0	68.2	**2,491.85**
DC-2.1/4"	49.6-54.5	25	50.5	55.0	2.1/4"	65.0	75.0	**2,908.90**
DC-2.1/2"	54.6-63.5	25	57.5	64.0	2.1/2"	77.0	89.0	**3,999.50**
DC-2.3/4"	63.6-69.5	25	63.0	70.0	2.3/4"	81.0	93.5	**4,515.35**
DC-3"	69.6-74.5	25	69.0	75.0	3"	86.0	99.5	**5,558.45**
DC-3.1/4"	74.6-81.0	25	75.0	81.5	3.1/4"	91.0	104.0	**6,437.20**
DC-3.1/2"	81.1-86.0	25	81.5	86.5	3.1/2"	102.0	117.0	**8,797.00**
DC-4"	86.1-100.0	25	92.0	102.0	4"	114.0	132.0	**11,406.65**

SR. NO.	PARTICULARS	MATERIAL	NOS.	SR. NO.	PARTICULARS	MATERIAL	NOS.
1.	NIPPLE	BRASS	1	6.	CONE RING	BRASS	1
2.	CHECK NUT	BRASS	1	7.	GLAND BODY	BRASS	1
3.	GASKET	NEOPRENE	1	8.	COMPRESSION NUT	BRASS	1
4.	INNER SEAL	NEOPRENE	1	9.	OUTER SEAL	NEOPRENE	1
5.	CONE	BRASS	1				

Tolerances: +/-5% (unless otherwise specified). All dimensions in MM. Prices under "Dew price (₹)" are per piece in ₹ (INR), ex-works, exclusive of taxes, and subject to change without prior notice.


WE RESERVE THE RIGHTS AT ANY TIME TO MAKE ANY SPECIFICATION OR DIMENSIONAL CHANGES DEEMED NECESSARY TO ENSURE ADVANCEMENT IN THE DESIGN OR MANUFACTURE OF ANY PRODUCT



Copper Bonded Earth rod




Earth Rod Coupler



Rod to Cable Clamp Type G



Rod to Tape Clamp Type A



U Bolt rod to tape clamp Type E



Driving stud



U Bolt Rod to 3 cable clamp




Earth Bonding Point 2 Hole



Jointing Clamp



Re- Bar Clamp



Air Terminal Base



Tape Clip



D.C. Tape Clip




Square Tape Clamp



Cable Clip




Tee Clamp



Square Conductor Clamp



Rod to tap Coupling



Earthing plate



Rod to Cable Coupling



Screw Down Test Clamp



Strike Pad



Copper Tape



Air Rod Brackets

TERMINAL & WIRING CONTACT



















Hygrid Cross Connector



“6” Hytap Connector



“ C” Hytap Connector




Hytail Ground Rod Tap Connector



Double “H” Tap Connector



Ground Link Connector



Hytap Ground Electrod tap Connector.



Hylink Heavy Duty Splice.



Water pipe Ground clamp




Rain Water Pipe Bond



Oblong Test Clamp



Bi-Metallic Connector



Glazing Bar Hold Fast



One Hole Cable Clip



Brass Cable Clip



D Iron Clamp



Copper Bus Bar



Copper Bus Bar



Brass Terminal Block



Brass Forging component



Wire Terminal



Fluid Pipe Fitting

LT DEAD END CLAMP REC TYPE





LT SUSPENSION CLAMP REC TYPE







TENSION CLAMP





SUSPENSION CLAMP







HT DEAD END CLAMP





EYE HOOK







POLE CLAMP





SUB-STATION CLAMP AND CONNECTOR







Dewconect
Together We Grow

TRANSMISSION LINE HARDWARE & ACCESSORIES





INSULATOR HARDWARE AND ACCESSORIES









TRANSMISSION LINE HARDWARE & ACCESSORIES






For enquiries, product information and business opportunities, visit our website: www.dewconect.com